

CGM6812-B00 - Pre-calibrated module for combustible gas

Features:


- * Linear analog output proportional to gas concentration
- * Maintenance free
- * Compact size
- * Meets RoHS requirements

The **CGM6812-B00** combustible gas sensor module is a new unit which utilizes **TGS6812**, Figaro's catalytic pellistor type gas sensor which features durability and stability. This module provides analog output voltage proportional to hydrogen gas concentration. CGM6812-B00 has conformal coatings for moisture-proofing and electrical insulation purposes, and is also capable of detecting sensor wire breakage. The unit has a wide range of operating temperature from -10° to +60°C.

Because the TGS6812 sensor can detect methane and LP gas as well as hydrogen, this module is suitable for gas leak detection in stationary fuel cells which use hydrogen generated from combustible gases.

Sensitivity Characteristics

The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (*see reverse side of this sheet*). The Y-axis is indicated as output voltage.

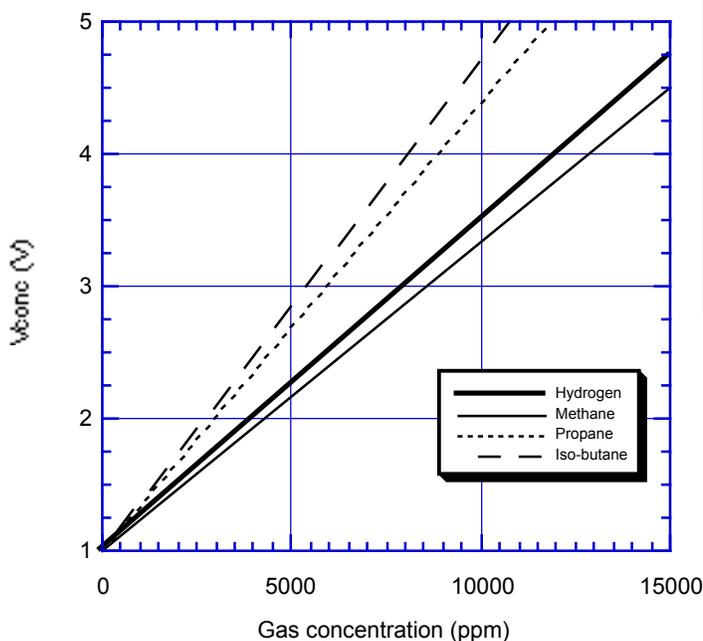

Applications:

- * Gas leak detection in fuel cell systems
- * Hydrogen & combustible gas leak detectors



| Pin No. | Name | Description |
|---------|-------|------------------------------|
| 1 | GND | Common ground |
| 2 | NC | Any connection prohibited |
| 3 | NC | Any connection prohibited |
| 4 | VCONC | Concentration output voltage |
| 5 | VIN | Input voltage |

CGM6812-B00 Pin Connections
 (Connector model BH05B-XMSK)
 Recommended receptacle for connector: XMP-05V

Specifications

| | | |
|--|--|---|
| Product name | Combustible gas sensor module | |
| Model No. | CGM6812-B00 | |
| Gas sensor | TGS6812 (catalytic type) | |
| Detection range | 0 ~ 14,000ppm H ₂ <i>(also can detect methane, iso-butane, and propane)</i> | |
| Output voltage (V _{conc}) | 1~4.5V DC typical (up to max VIN) | |
| | Conversion to H ₂ concentration | V _{out} =[H ₂ conc(ppm)/4000] + 1.0 |
| | Trouble | V _{conc} =0~0.1V(*) |
| Factory setting output | V _{conc} in air | 1.0±0.2V |
| | V _{conc} in 8000ppm H ₂ | 3.0±0.2V |
| Response time (T ₉₀) to 4000ppm H ₂ | ≤30 seconds | |
| Warm-up time (V _{conc} <2.0V) | ≤30 seconds (time to V _{conc} <2.0V in air) | |
| Operating conditions | -10°~+60°C, 20~95%RH (avoid condensation) | |
| Storage conditions | -10°~+60°C, 20~95%RH | |
| Input voltage (VIN) | 5.0±0.2V DC | |
| Power consumption | ≤1.5W | |
| Weight | 15g or less | |
| Dimensions | 50 x 30 x 25.3mm | |
| Position dependency | Since the module has position dependency, it should be mounted so the two lug-holes are in a horizontal position | |
| Standard test conditions | Ambient conditions | 20±2°C, 65±5%RH |
| | Circuit conditions | 5.0±0.2V DC |
| | Conditioning period prior to test | ≥10 minutes |

(*) recommended threshold for trouble detection = 0.2V

Dimensions

