


AMPCON series

Transmitter of photocurrent to 4 - 20 mA current loop

▶ 1/2

GENERAL FEATURES



Properties of the AMPCON

The AMPCON converts a photocurrent to an industry standard current loop signal. It exhibits a loop-powered (passive) 4 to 20 mA sensor to any PLC system.


Three models with different measurement ranges are available. Gain and offset can be adjusted by potentiometers. The measurement range can also be customized by replacing passive components (see description on page 2).

SPECIFICATIONS

| Parameter | Value |
|--------------------------------|---|
| Photocurrent measurement range | AMPCON_low 250 μ A |
| | AMPCON_med 2.5 μ A |
| | AMPCON_high 25 nA |
| Loop supply voltage | (10 to 24) V \pm 10 % depending on loop resistance |
| Total loop resistance | \leq 700 Ω @ 24V, \leq 100 Ω at 10V |
| Gain adjustment range | \pm 35% |
| Offset adjustment range | 4 mA (\pm 12.5%) |
| Dimensions | 13 x 26 x 8 mm (WxLxH) |
| Operating temperature | -20 to +80 $^{\circ}$ C |
| Storage temperature | -40 to +80 $^{\circ}$ C |
| Standards | RoHS 2 2011/65/EU, DIN IEC 60381-1 |

We strongly recommend to process this product on ESD protected workplaces.

CONNECTION

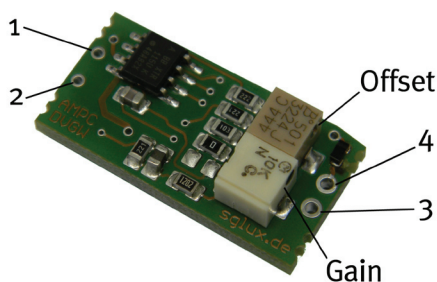


- 1 - Photodiode anode
- 2 - Photodiode cathode
- 3 - Signal output (connect to current input)
- 4 - V+ power supply
- Gain - turn left to increase the gain
- Offset - turn left to decrease the offset

AMPCON series

Transmitter of photocurrent to 4 - 20 mA current loop

CUSTOMIZATION OF MEASUREMENT RANGE

2/2

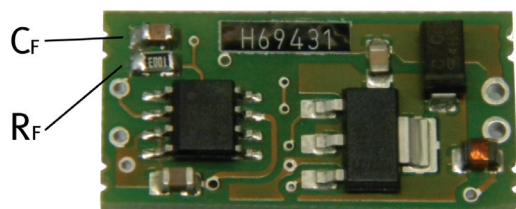

To modify the measurement range beyond the available adjustment range the feedback resistor R_f must be replaced. The adjustment range remains unaffected by this change. I_{\max} is the designated maximum photocurrent to be measured.

$$R_{f,\text{new}} \text{ (in } \Omega\text{)} = 2160 / I_{\max} \text{ (in nA)}$$

The capacitor C_f defines the time constant τ of the measurement and may need modification too. By default τ is 10 ms for all models. The required value of C_f can be calculated from $R_{f,\text{new}}$ and the intended time constant:

$$C_f \text{ (in nF)} = \tau_{\text{new}} \text{ (in ms)} / R_{f,\text{new}} \text{ (in } \Omega\text{)}$$

Recommended values:

$10 \text{ k}\Omega \leq R_{f,\text{new}} \leq 3 \text{ G}\Omega$ and $1 \text{ ms} \leq \tau \leq 200 \text{ ms}$, $C_{f,\text{new}} \geq 33 \text{ pF}$,
components package 0805 (2.0 x 1.25 mm)

Default component values:

| Model | R_f | C_f |
|-------------|----------------|-----------|
| AMPCON_low | 10 k Ω | 1 μ F |
| AMPCON_med | 1 M Ω | 10 nF |
| AMPCON_high | 100 M Ω | 100 pF |