




# PID-AH5 Photo Ionisation Detector



**Figure 1 PID-AH5 Schematic Diagram**

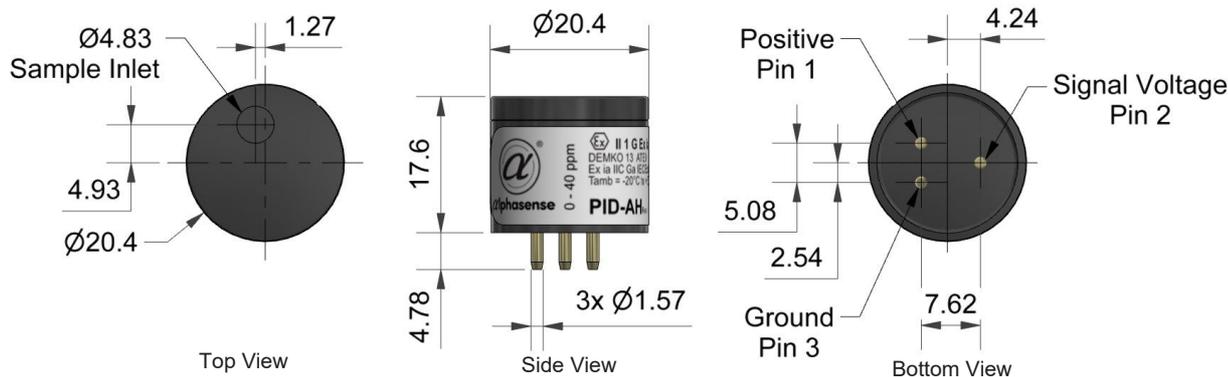

**Notes:**

- Do not obstruct Ø4.83 sensing area
- Pin out details:  
Pin 1: + V supply  
Pin 2: Signal output  
Pin 3: 0 V supply
- All dimensions ±0.1mm unless otherwise stated
- Use of socketed connection is required.
- Soldering or cutting the connection pins may permanently damage the sensor and void the warranty.

**PERFORMANCE** (using 10.6 eV lamp)

Target gases	VOCs with ionisation potentials < 10.6 eV		
Minimum resolution	ppb isobutylene		3
Linear range	ppm isobutylene		40
Overrange	ppm isobutylene		40
Sensitivity minimum range	linear range	mV / ppm Isobutylene	25
Sensitivity typical range	linear range	mV / ppm Isobutylene	50
Full stabilisation time	minutes		5
Warm up time	seconds	time to full operation	5
Offset voltage	mV		40~75
Response time (t <sub>90</sub> )	seconds	diffusion mode	2

**ELECTRICAL**

Power consumption	80 mW ~ 200 mW depending on supply
Supply voltage	voltage 3.2 ~ 5.5 VDC
Output signal	0.040~2.85V

**ENVIRONMENTAL**

Temperature range	-20°C ~ +60°C	
Temperature dependence	see chart	
Relative humidity range	Non-condensing	0 to 95%
Humidity sensitivity	During operations: 0% to 75% rh transient	near zero

**KEY SPECIFICATIONS**

Operating life	5 years (excluding replaceable lamp and electrode stack)
IS Approval	IECEX Ex ia IIC Ga; ATEX II 1 G Ex ia IIC Ga -20°C < Ta < +60°C
Onboard filter	To remove liquids and particulates
Lamp	User replaceable. Expected life = 10,000 hours
Electrode stack	User replaceable
Weight	< 8g
Position sensitivity	None
Warranty period	Electronics and housing: 12 months Lamp and electrode stack are user replaceable. 10.6eV lamp: 6,000 lit hours
Patent information	US Pat 6,646,444. Japan Pat 3,793,757

**NOTE:** all sensors are tested at ambient environmental conditions, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Technical Specification



# PID-AH5 Performance Data

Technical Specification

**Figure 2 Sensitivity Temperature Dependence**

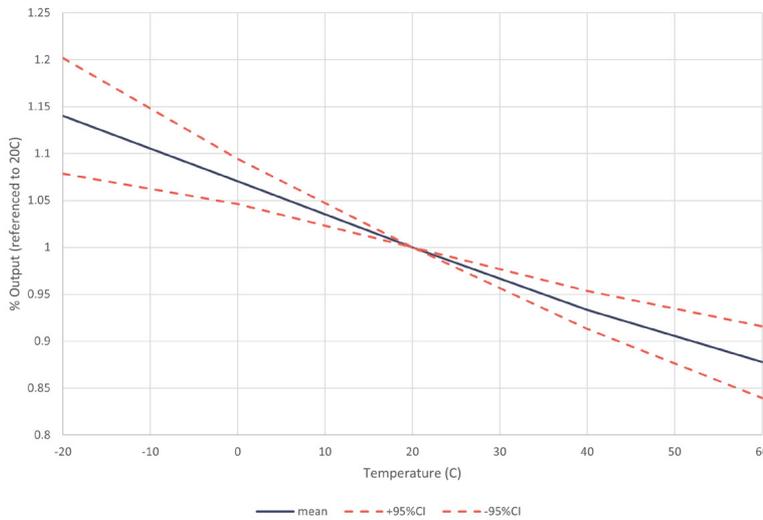


Figure 2 shows the temperature dependence, corrected for the gas law.

This data is taken from a typical batch of PID-AH5 sensors tested with 10ppm Isobutylene.

The mean and  $\pm 95\%$  confidence intervals are shown.

**Figure 3 Linearity to Isobutylene**

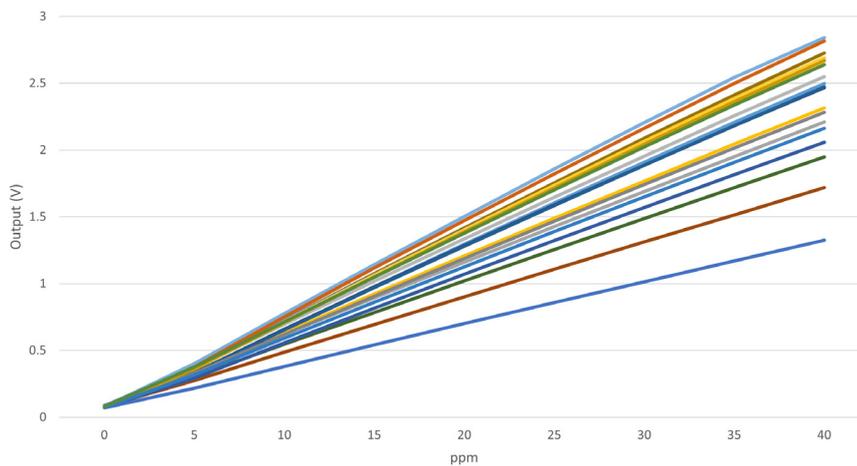


Figure 3 shows the response curve of 20 sensors throughout the entire operating range. Sensors are linear throughout the entire range.

**Table 1: PID Replaceable Parts/Consumables List**

Part Number	Description	Part Number	Description
001-003	Gas Hood	001-0043-00	Maintenance Kit, which includes: 2 ea Polishing Disc
001-0037-00	Cap with Key		2 ea 10 $\mu$ m, Cloth, Bottom Filter
001-0038-00	Spacer		2 ea 1 $\mu$ m, Teflon, Top Filter, Large
001-0039-00	1 $\mu$ m, Teflon, Top Filter, Large		1 ea Padded Swab
001-0040-00	10 $\mu$ m, Cloth, Bottom Filter	001-0044-00	Sensor Rebuild Kit, which includes: 2 ea 10.6 eV Lamp
001-0041-00	Detector Ionisation Cell Assembly		1 ea Detector Ionisation Cell Assembly
001-0042-00	10.6 eV Lamp		1 ea 1 $\mu$ m, Teflon, Top Filter, Large
001-0046-00	10.6 eV Lamp Individual Package	001-0045-00	1 ea 10 $\mu$ m, Cloth, Bottom Filter
		001-0047-00	Lamp Cleaning Kit
			Fast Response 0 to 2000 ppm sensor

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: all sensors are tested at ambient environmental conditions unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. ©ALPHASENSE LTD) Doc. Ref. PIDA15/APR22