

Commercial & Metering Class Current Transformers

Current Transformers

F



RL



SFT



SFL



SHT



SHL



RT



RBT



RBL

The CR Magnetics line of Instrumentation Grade Electrical Current Transformers are available in either Commercial or ANSI Metering Class. The Commercial Class transformers are lower cost and well-suited for current monitoring applications. The ANSI Metering Class transformers are higher-cost units intended for power monitoring applications where high accuracy and minimum phase angle error are required. Twelve different window openings and eight different mounting styles along with numerous secondary ratios are available to meet most applications. This short form catalog shows an overview of our most popular 5 amp secondary transformers. Contact factory for different sizes or unique electrical requirements.

Applications

- Ammeters
- Energy Measurement
- Watt/VAR/Watthour Measurement
- Current Sensing Relays

Features

- Low Cost
- Core Secured via Epoxy Resin
- Hand Tuned Accuracy
- Common Ratios in Stock

Regulatory Agencies



BASIC SPECIFICATIONS

Basic Accuracy	10% FS or Better (ANSI)
Thermal Drift	100 PPM/ $^{\circ}$ C
Operating Temperature	-20 $^{\circ}$ C to +75 $^{\circ}$ C
Installation Category	CAT II
Pollution Degree	2
Insulation Voltage	3500 Vac/1min
Frequency Range	50Hz - 400Hz
Torque Spec on Studs	10 in/lb.

CUSTOM OPTIONS

Ultra-Low Frequency to 20 Hz









1.0, 0.2, and 0.1 Amp Secondary Ratios

Commercial & ANSI Metering Class Current Transformers

Current Transformers

F

DIMENSIONS

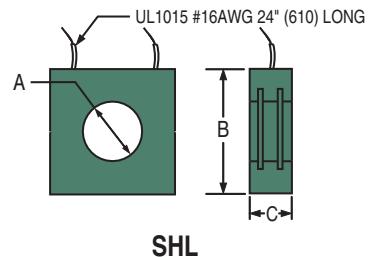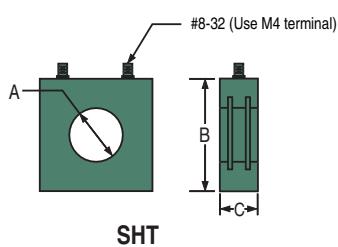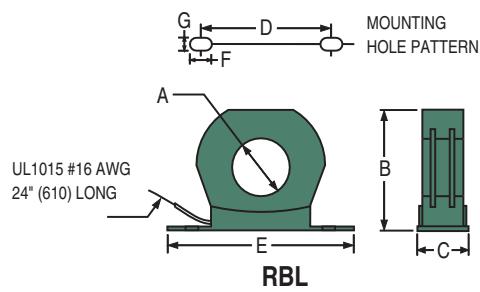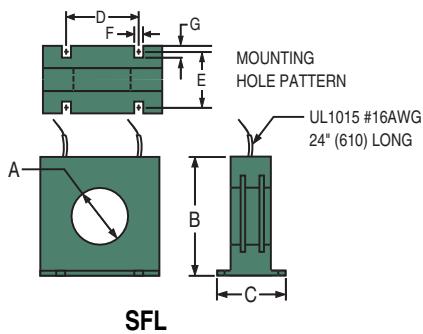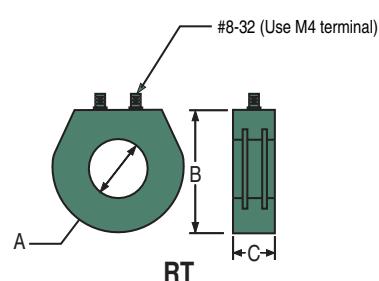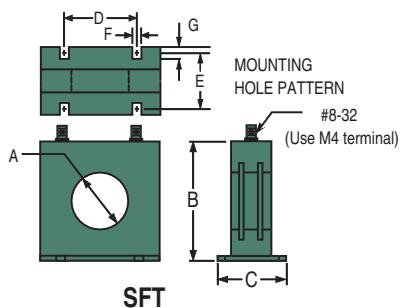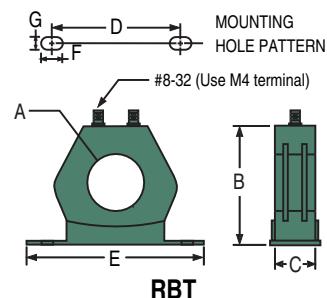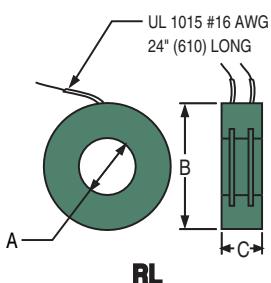

Commercial Class Current Transformers

Current Transformers

F

Part Numbers			Dimensions							Accuracy Specifications		
Series	Style	Ratio Suffix	A	B	C	D	E	F	G	Current Ratio	Accuracy at 60Hz	Burden VA at 60 Hz
CR2	RL	500	1.13 (28.7)	2.46 (62.5)	1.05 (26.7)	1.75	1.75 (44.5)	.27 (6.9)	.31 (7.9)	50:5	± 3%	2.0
		600								60:5	± 2%	2.0
	SFT	750								75.5	± 2%	2.0
		800								80:5	± 2%	2.0
	SFL	101								100:5	± 1%	2.0
		121								120:5	± 1%	2.5
	SHT	1250								125:5	± 1%	2.5
		151								150:5	± 1%	4.0
	SHL	201								200:5	± 1%	4.0
		251								250:5	± 1%	6.0
		301								300:5	± 1%	8.0
CR5	RL	500	1.56 (39.6)	3.56 (90.4)	1.10 (27.9)					50:5	± 2%	1.0
		750								75.5	± 2%	1.5
	SFT	101		3.78 (96.0)	2.15 (54.6)	2.75 (69.9)	1.77 (45.0)	.21 (5.3)	.31 (7.9)	100:5	± 2%	2.0
		151								150:5	± 1%	5.0
	SFL	201		3.78 (96.0)	2.15 (54.6)	2.75 (69.9)	1.77 (45.0)	.21 (5.3)	.31 (7.9)	200:5	± 1%	5.0
		251								250:5	± 1%	10.0
	SHT	301		3.83 (97.3)	1.09 (27.7)					300:5	± 1%	12.5
		401								400:5	± 1%	12.5
	SHL	501		3.83 (97.3)	1.09 (27.7)					500:5	± 1%	20.0
		RT								600:5	± 1%	25.0
	RBT*	601		3.62 (91.9)	1.13 (28.7)					750:5	± 1%	25.0
		751								800:5	± 1%	25.0
	RBL*	801		3.90 (99.1)	1.25 (31.8)	3.88 (98.6)	4.50 (114.3)	.44 (11.2)	.27 (6.9)	1000:5	± 1%	25.0
		102								1200:5	± 1%	30.0
CR7	RL	101	2.50 (63.5)	4.70 (919.4)	1.10 (27.4)					100:5	± 2%	2.5
		151								150:5	± 1%	5.0
	SFT	201		4.85 (123.2)	2.13 (54.1)	3.78 (96.0)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	200:5	± 1%	5.0
		251								250:5	± 1%	5.0
	SFL	301		4.85 (123.2)	2.13 (54.1)	3.78 (96.0)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	300:5	± 1%	12
		401								400:5	± 1%	15
	SHT	501		4.70 (119.4)	1.10 (27.9)					500:5	± 1%	25
		601								600:5	± 1%	30
	SHL	751		4.70 (119.4)	1.10 (27.9)					750:5	± 1%	30
		RT								800:5	± 1%	35
	RBT	801		4.61 (117.1)	1.10 (27.9)					1000:5	± 1%	30
		102								1200:5	± 1%	35
	RBL	122		4.94 (125.5)	1.25 (31.8)	5.75 (146.1)	6.5 (7.1)	.28 (16.5)	.28 (7.1)	1500:5	± 1%	40
		152								1600:5	± 1%	40

Commercial Class Current Transformers

Current Transformers

F

Part Numbers			Dimensions							Accuracy Specifications		
Series	Style	Ratio Suffix	A	B	C	D	E	F	G	Current Ratio	Accuracy at 60Hz	Burden VA at 60 Hz
CR56	RL	500	2.06 (52.3)	3.50 (88.9)	1.09 (27.7)	2.70 (68.6)	1.70 (43.2)	.21 (5.3)	.31 (7.9)	50:5	± 3%	2.0
		750								75.5	± 1%	0.5
	SFT	101		3.63 (92.2)	2.15 (54.6)	2.70 (68.6)	1.70 (43.2)	.21 (5.3)	.31 (7.9)	100:5	± 1%	1.0
		151								150:5	± 1%	2.5
	SFL	201		3.63 (92.2)	2.15 (54.6)					200:5	± 1%	4.0
		251								250:5	± 1%	6.0
	RT	301								300:5	± 1%	7.5
		401		3.62 (91.9)	1.10 (27.9)					400:5	± 1%	10.0
	RBT	501								500:5	± 1%	12.5
		601								600:5	± 1%	15.0
	RBL	751		3.90 (99.1)	1.25 (31.8)	3.88 (98.6)	4.50 (114.3)	.27 (6.9)	.44 (11.2)	750:5	± 1%	7.0
		801								800:5	± 1%	8.0
	RBL	102		3.70 (94.0)	1.25 (31.8)	3.88 (98.6)	4.50 (114.3)	.27 (6.9)	.44 (11.2)	1000:5	± 1%	10.0
		122								1200:5	± 1%	12.5
CR76	RL	201	3.00 (76.2)	4.50 (114.3)	1.09 (27.7)					200:5	± 1%	5.0
		251								250:5	± 1%	5.0
	SFT	301		4.68 (128.9)	2.08 (52.8)	3.70 (44.0)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	300:5	± 1%	6.0
		401								400:5	± 1%	10.0
	SFL	501		4.68 (118.9)	2.08 (52.8)	3.70 (44.0)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	500:5	± 1%	10.0
		601								600:5	± 1%	10.0
	RT	751								750:5	± 1%	10.0
		801		4.62 (117.3)	1.10 (27.9)					800:5	± 1%	12.5
	RBT	102								1000:5	± 1%	10.0
		122		4.94 (125.5)	1.25 (31.8)	5.75 (146.1)	6.50 (165.1)	.28 (7.1)	.28 (7.1)	1200:5	± 1%	10.0
	RBL	152								1500:5	± 1%	12.5
		162								1600:5	± 1%	12.5
	RBL	202		4.70 (119.4)	1.25 (31.8)	5.75 (146.1)	6.50 (165.1)	.28 (7.1)	.28 (7.1)	2000:5	± 1%	15.0
CR1A	RL	500	.64 (16.3)							50:5	± 2%	1.0
		600								60:5	± 1%	2.0
		750								75.5	± 1%	2.0
		800								80:5	± 1%	2.0
		101								100:5	± 1%	2.5
		121								120:5	± 1%	3.0
		1250								125:5	± 1%	3.0
		151								150:5	± 1%	4.0
		201								200:5	± 1%	5.0
		251								250:5	± 1%	7.5

ANSI Metering Class Current Transformers

Current Transformers

F

PART NUMBERS			DIMENSIONS					ANSI METERING CLASS @ 60 HZ							
SERIES	STYLE	RATIO SUFFIX	A	B	C	D	E	F	G	CURRENT RATIO	B0.1	B0.2	B0.5	B0.9	B1.8
CR2DA	RL	500	1.0 (25.4)	2.47 (62.7)	1.75 (44.5)					50:5	4.8	-	-	-	-
		600								60:5	1.2	4.8	-	-	-
		750								75:5	1.2	2.4	-	-	-
		800								80:5	1.2	2.4	4.8	-	-
		101								100:5	1.2	2.4	4.8	-	-
		121								120:5	1.2	2.4	2.4	4.8	-
		1250								125:5	0.6	1.2	2.4	4.8	-
		151								150:5	0.6	0.6	1.2	2.4	4.8
		201								200:5	0.3	0.3	1.2	1.2	2.4
		251								250:5	0.3	0.3	0.6	1.2	2.4
		301								300:5	0.3	0.3	0.6	0.6	1.2
CR5A	RL	500	1.56 (39.6)	3.56 (90.4)	1.10 (27.9)					50:5	4.8	-	-	-	-
		101								100:5	2.4	4.8	-	-	-
		151								150:5	0.6	1.2	2.4	4.8	-
		201								200:5	0.6	0.6	1.2	2.4	4.8
	SFT	251		3.77 (95.8)	2.15 (54.6)					250:5	0.6	0.6	1.2	2.4	2.4
		301								300:5	0.3	0.3	0.6	1.2	2.4
		401								400:5	0.3	0.3	0.6	1.2	1.2
		501								500:5	0.3	0.3	0.6	0.6	1.2
	SFL	601	1.56 (39.6)	3.77 (95.4)	2.15 (54.6)	2.75 (69.9)	1.77 (45.0)	.21 (5.3)	.31 (7.9)	600:5	0.3	0.3	0.3	0.6	1.2
		751								750:5	0.3	0.3	0.3	0.6	0.6
		801								800:5	0.3	0.3	0.3	0.6	0.6
		102								1000:5	0.3	0.3	0.3	0.3	0.6
	SHT	122								1200:5	0.3	0.3	0.3	0.3	0.3
		101	2.06 (52.3)	4.08 (103.6)	1.10 (27.9)					100:5	1.2	2.4	-	-	-
		151								150:5	1.2	1.2	2.4	4.8	-
		201								200:5	0.6	1.2	2.4	2.4	4.8
CR6A	RL	251		4.21 (106.9)	2.12 (54.6)	3.34 (84.8)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	250:5	0.3	0.6	1.2	2.4	4.8
		301								300:5	0.3	0.3	1.2	2.4	2.4
		401								400:5	0.3	0.3	0.6	1.2	1.2
		501								500:5	0.3	0.3	0.6	1.2	1.2
	SFL	601		4.21 (106.9)	2.12 (54.6)	3.34 (84.8)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	600:5	0.3	0.3	0.6	0.6	1.2
		751								750:5	0.3	0.3	0.3	0.6	1.2
		801								800:5	0.3	0.3	0.3	0.6	0.6
		102								1000:5	0.3	0.3	0.3	0.3	0.6
	SHT	122		4.22 (107.2)	1.10 (27.9)					1200:5	0.3	0.3	0.3	0.3	0.3
		152								1500:5	0.3	0.3	0.3	0.3	0.3

ANSI Metering Class Current Transformers

Current Transformers

F

Part Numbers			Dimensions						ANSI METERING CLASS @ 60 HZ						
Series	Style	Ratio Suffix	A	B	C	D	E	F	G	Current Ratio	B0.1	B0.2	B0.5	B0.9	B1.8
CR7A	RL	101	4.70 (119.4)	1.10 (27.9)					.31 (7.9)	100:5	1.2	4.8	-	-	-
		151								150:5	0.6	1.2	4.8	4.8	-
		201								200:5	0.6	1.2	2.4	4.8	4.8
		251			4.85 (123.2)	2.13 (54.1)	3.78 (96.0)	1.75 (44.5)	.25 (6.4)	250:5	0.3	0.6	1.2	2.4	4.8
	SFT	301	2.50 (63.5)	4.85 (123.2)	2.13 (54.1)	3.78 (96.0)	1.75 (44.5)	.25 (6.4)	.31 (7.9)	300:5	0.3	0.3	1.2	2.4	2.4
		401								400:5	0.3	0.3	0.6	1.2	2.4
		501								500:5	0.3	0.3	0.6	1.2	1.2
		601								600:5	0.3	0.3	0.6	0.6	1.2
	SFL	751	4.70 (119.4)	1.10 (27.9)						750:5	0.3	0.3	0.6	0.6	0.6
		801								800:5	0.3	0.3	0.3	0.6	0.6
		102								1000:5	0.3	0.3	0.3	0.6	0.6
		122								1200:5	0.3	0.3	0.3	0.3	0.6
	SHT	152	4.70 (119.4)	1.10 (27.9)						1500:5	0.3	0.3	0.3	0.3	0.3
		162								1600:5	0.3	0.3	0.3	0.3	0.3
CR8	RL	201	5.73 (145.5)	1.15 (29.2)						200:5	1.2	1.2	2.4	4.8	4.8
		251								250:5	0.6	0.6	1.2	2.4	4.8
		301								300:5	0.6	0.6	1.2	2.4	2.4
		401								400:5	0.3	0.3	0.6	1.2	2.4
	SHT	501	3.25 (82.6)	5.73 (145.5)	1.15 (29.2)					500:5	0.3	0.3	0.6	1.2	1.2
		601								600:5	0.3	0.3	0.6	0.6	1.2
		751								750:5	0.3	0.3	0.3	0.6	1.2
		801								800:5	0.3	0.3	0.3	0.6	0.6
	SHL	102	5.73 (145.5)	1.15 (29.2)						1000:5	0.3	0.3	0.3	0.3	0.6
		122								1200:5	0.3	0.3	0.3	0.3	0.3
		152								1500:5	0.3	0.3	0.3	0.3	0.3
		162								1600:5	0.3	0.3	0.3	0.3	0.3
CR170	RL	201	6.73 (170.9)	1.25 (31.8)						200:5	0.6	1.2	2.4	-	-
		251								250:5	0.6	0.6	1.2	2.4	-
		301								300:5	0.6	0.6	1.2	2.4	-
		401								400:5	0.3	0.3	0.6	1.2	2.4
	SHT	501	4.25 (108)	6.73 (170.9)	1.28 (32.5)					500:5	0.3	0.3	0.6	1.2	1.2
		601								600:5	0.3	0.3	0.6	0.6	1.2
		751								750:5	0.3	0.3	0.3	0.3	0.6
		801								800:5	0.3	0.3	0.3	0.3	0.6
	SHL	102	6.73 (170.9)	1.28 (32.5)						1000:5	0.3	0.3	0.3	0.3	0.6
		122								1200:5	0.3	0.3	0.3	0.3	0.6
		152								1500:5	0.3	0.3	0.3	0.3	0.6
		162								1600:5	0.3	0.3	0.3	0.3	0.6
	SHT	202	6.73 (170.9)	1.28 (32.5)						2000:5	0.3	0.3	0.3	0.3	0.3
		252								2500:5	0.3	0.3	0.3	0.3	0.3
		302								3000:5	0.3	0.3	0.3	0.3	0.3
		322								3200:5	0.3	0.3	0.3	0.3	0.3
	SHL	402	6.73 (170.9)	1.28 (32.5)						4000:5	0.3	0.3	0.3	0.3	0.3