


M56310

(

COMBUSTIBLE GAS DETECTOR



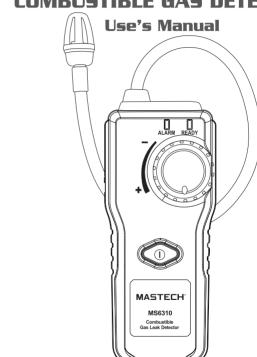

R-00-05-0797

iSweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: +86-755-83289036

Fax: +86-755-83289052

E-mail: sales@isweek.com



Type of Gases Detected:

Natural gas, methane (sewage gas), ethane, propane, butane, acetone, alcohol, ammonia, hydrogen, gasoline steam, sulfide, organic solvent steam, smoke, paint thinner. naphtha, volatile industrial solvents.

Functions Description:

- Quickly recognize and determine the flammable gas leakage location
- Manual sensibility adjustment
- High sensibility
- Visible sound and light alarm

Important Notice:

- Please use the product in pure air after preheating.
- Please replace battery immediately when green light flashes.
- Please power off when not using to prevent battery discharge.

Main Parameters:

- Resolution: 50 ppm (methane)
 Alarm range: 10%~40% LEL
- Response time: < 2S (40% LEL)

Use Method:

Red light: alarm detection indicator Green light: power indicator and low voltage power supply alarm indicator

• In pure air, press the power key to start up. The green light will turn on.

 Rotate the knob clockwise to the lowest sensitivity position. Wait for at least 2 minutes for preheating.

Note: In the preheating process, the red light will flash uninterruptedly along with alarm sound, which is due to the sensor not being stable. You may ignore this condition.

- After preheating, rotate the knob counter-clockwise to the critical emergency alarm set point. At this time, the detection sensitivity is at maximum. The red light will not light without the alarm. . The red light will light only occasionally. This does not affect meter performance.
- Hold the meter with one hand. Do not adjust the knob now. Move the sensor slowly close to the detected gas.
 When the meter detects a certain concentration of flammable gas, the red light will flash and the alarm will sound. The greater the concentration is, the more intense the alarm will be.
- After the completion of detection, rotate the knob clockwise to the lowest sensibility position. Press the power supply key to power off, and the green light will turn off.

Specifications:

- Operating temperature: 0~50°C
- Operating humidity: 10 ~90% (above freezing)
- L×W×H: 172×70×46 mm
- Power supply mode: 4x1.5V AAA battery
- Weight: 330g (includes batteries)