

Temperature&UV Sensor Probe

GUx-T1xGC-TLW5

Features	Water Environment (<10 bar)	Single Supply Voltage, 0-5V Voltage Output
-----------------	-----------------------------	--

Applications	UV Power Measure	UV Lamp Monitoring, Temperature Monitoring
---------------------	------------------	--



LW5 Probe (Socket : 8A PT tab SUS)



Connection Cable (IP67, 5m, 6 shielded wires.)

Fig1. Temperature&UV Sensor Probe

Case dimensions

Thread/Length for Mounting	Diameter (mm)	Window (mm)	Wrench Size (mm)	Length (mm)	Weight (g)	Body (stainless steel)
PT1/4 "/12 mm	21	7	19	63	67	316L (1.4404)

Absolute Maximum Ratings


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Storage Temperature	T _{st}	-40		90	°C	
Operating Temperature	T _{op}	-30		85	°C	

Electro-Optical Characteristics (at 25 °C)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply Voltage	V _{cc}	9		24	V	DC
Supply Current	I _Q		3.3		mA	
Detection Range	GUUV-T11GC-TLW5	λ	230		nm	10% of Max.
	GUVB-T12GC-TLW5	λ	220		nm	10% of Max.
	GUVC-T11GC-TLW5	λ	220		nm	10% of Max.
Output Voltage	V _{out}	0		5	V	
Detection Power Range	P	0		100	mW/cm ²	
Detection Temperature Range	T _a	-40		125	°C	tolerance within ±2°C
Response Time	T		10		ms	

* Maximum of detection power : 20 mW/cm² (Option), 100 mW/cm² (Standard), 1000 mW/cm² (Option)


Output Voltage along UV power



GUUV-T11GC-TLW5



GUVB-T12GC-TLW5

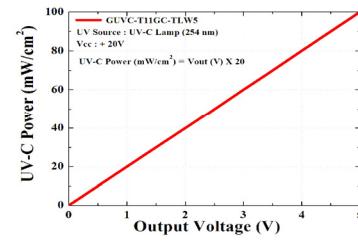

GUVC-T11GC-TLW5

$$\text{UV Power (mW/cm}^2\text{)} = \text{Vout (V)} \times 20$$

* Cover thread with teflon tape before turning in. Please also use a sealing ring behind thread.