

UV-A Sensor


GUVV-T20GD-U

Features	Indium Gallium Nitride Based Material Schottky-type Photodiode Photovoltaic Mode Operation High Responsivity & Low Dark Current
-----------------	--



Applications	Full UV Band Monitoring UV-A Lamp Monitoring Sterilization Lamp Monitoring
---------------------	--

Outline Diagrams and Dimensions

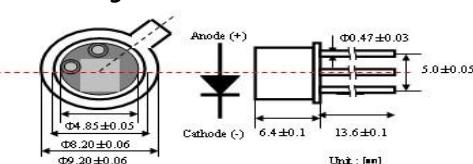

Absolute Maximum Ratings


Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	T _{st}	-40	90	°C	
Operating Temperature	T _{op}	-30	85	°C	
Reverse Voltage	V _r , max.		2	V	
Forward Current	I _{f,max.}		1	mA	
Optical Source Power Range	P _{opt}	0.01	100,000	μW/cm ²	UVA Lamp
Soldering Temperature	T _{sol}		260	°C	within 10 sec.

※Notice: apply to us in the case that Optical Source Power is over 100,000μW/cm².


Characteristics (at 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Dark Current	I _d			90	nA	V _r = 0.1 V
Photo Current	I _{ph}		14.7		μA	UVA Lamp, 1mW/cm ²
Temperature Coefficient	I _{tc}		0.1		%/°C	UVA Lamp
Responsivity	R		0.15		A/W	λ = 352 nm, V _r = 0 V
Spectral Detection Range	λ	230		395	nm	10% of R
Active area			6.894		mm ²	

Responsivity Curve

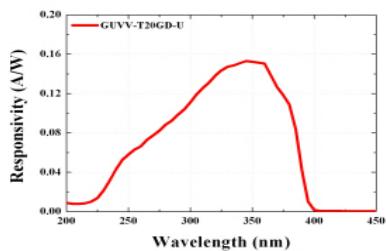

Photocurrent along UV Power

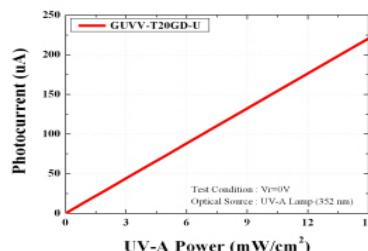

Caution

ESD can damage the device hence please avoid ESD.

Insulate the cap of TO-CAN or it can cause malfunction of the device.