


# MS8885B

## Capacitive 8-channel proximity switch with auto-calibration and very low power consumption

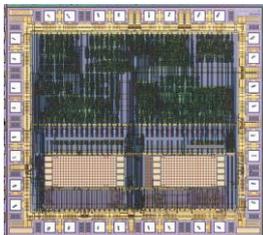

### 1 General Description

The integrated circuit MS8885B is a capacitive 8-channel proximity switch that uses a patented (EDISEN) method to detect a change in capacitance on remote sensing plates.


Changes in the static capacitances (as opposed to dynamic capacitance changes) are automatically compensated using continuous auto-calibration. Remote sensing plates (e.g. conductive foil) can be connected to the IC using coaxial cable.

The eight input channels operate independently of each other. There is also a built in option for a matrix arrangement of the sensors (interrupt generation only when two channels are activated simultaneously, suppression of additional channel outputs when two channels are already active).

### 2 Applications

- Hermetically sealed keys on a keyboard
- Switch for medical applications
- Switch for use in explosive environments
- Vandal proof switches
- Automotive: Switches in or under the upholstery, leather, handles, mats and glass
- Portable communication & entertainment units
- White goods
- Buildings: Switch in or under carpets, glass or tiles
- Sanitary applications: Use of standard metal sanitary parts (e.g. tap) as switch

### 3 Typical application

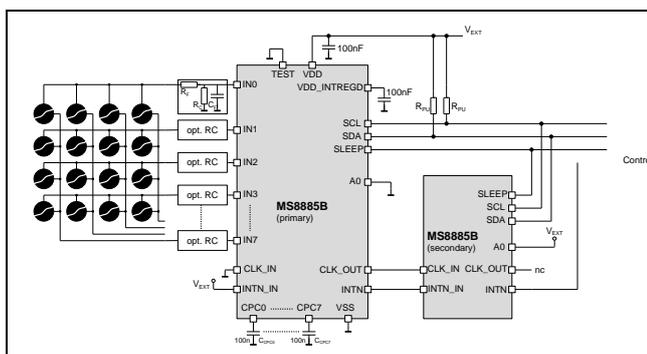

### 4 Features

- Dynamic proximity switch with 8 sensor channels
- Support for matrix arrangement of sensors
- Direct and latching switch modes
- Digital processing method
- Continuous auto-calibration
- Sensing plates can be connected remotely
- I<sup>2</sup>C Fast-mode Plus (Fm+) compatible interface
- Interrupt output
- Clock and interrupt cascading for two IC's possible
- Address LSB can be configured via external pin (two IC's can be addressed)
- Low-power battery operation possible (IDD ~ 10μA)
- Sleep mode (< 100nA)
- Adjustable response time
- Adjustable sensitivity
- Large voltage operating range (VDD = 2.5 to 5.5V)
- Temperature operating range Tamb = -40°C to 85°C
- Internal voltage regulator
- Available in 5x5mm QFN28 (other packages available for larger quantities)

### 5 Ordering Information

Table 1: Ordering information

| Type    | Package     | Shipping  | Article No. |
|---------|-------------|-----------|-------------|
| MS8885B | QFN28 5x5mm | Tape&Reel | 9160151     |

# MS8885B

## 6 Pinout

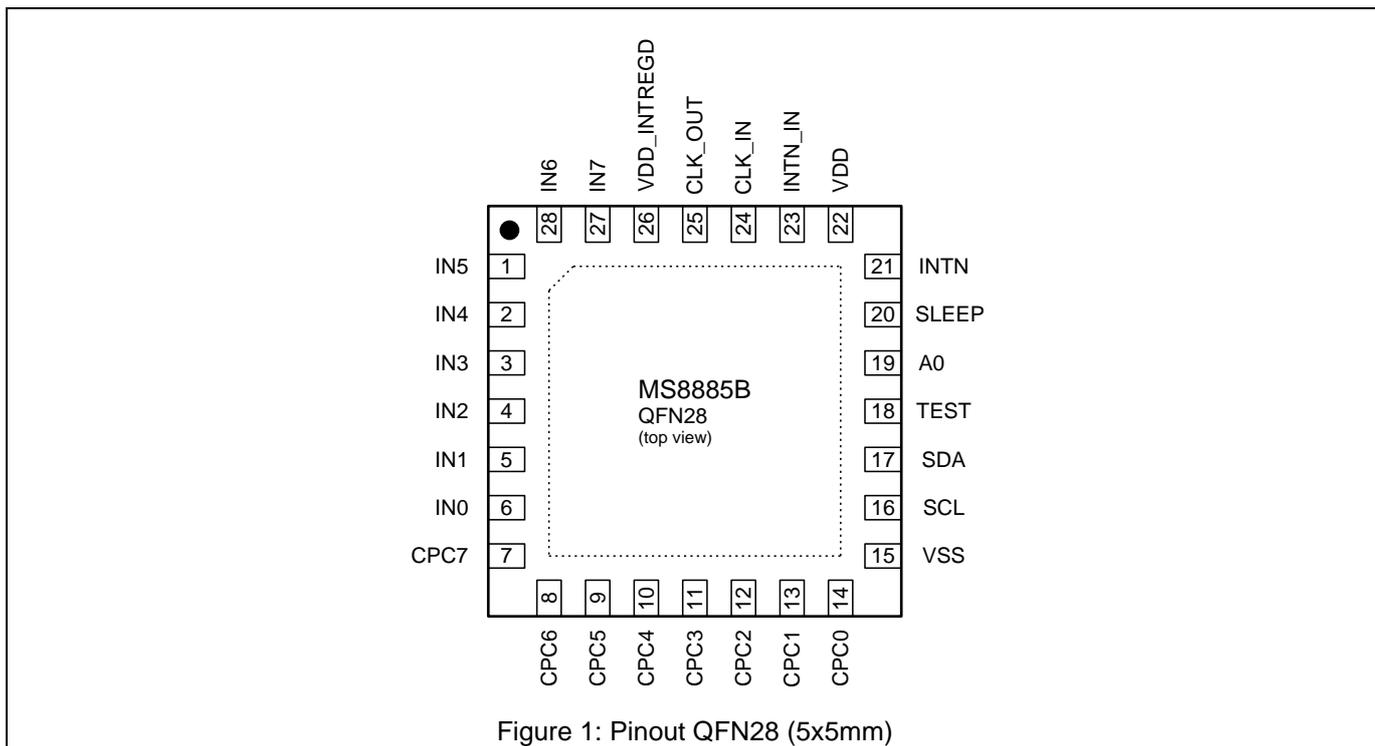


Figure 1: Pinout QFN28 (5x5mm)

## 7 Block diagram

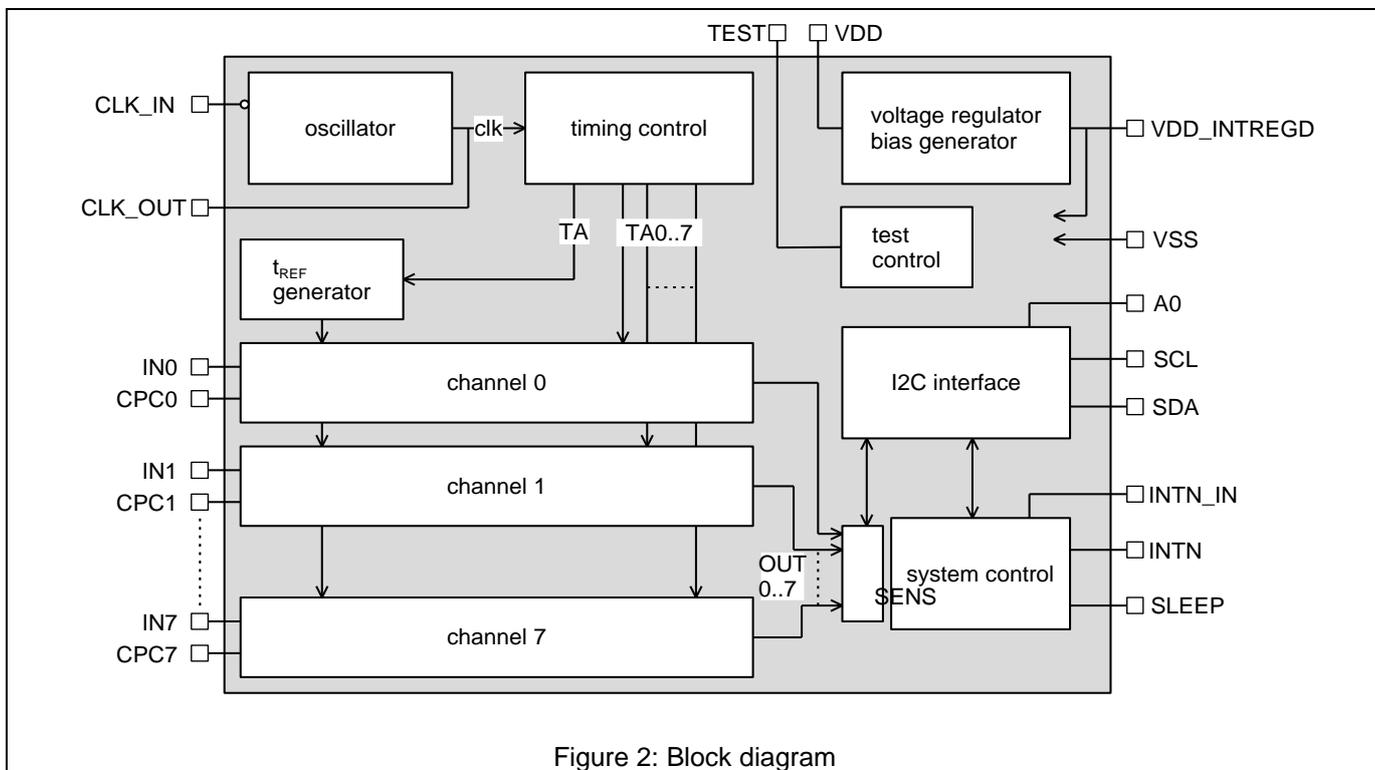


Figure 2: Block diagram

# MS8885B

## 8 Pin description

Table 2: Pin description

| Pin TSSOP28 | Pin QFN28      | Symbol       | I/O <sup>1</sup> | Description  |
|-------------|----------------|--------------|------------------|--|
| 26          | 22             | VDD          | S                | positive supply  |
| 2           | 26             | VDD_INTREGD  | S                | internal analog supply   |
| 19          | 15             | VSS          | S                | negative supply  |
| 10...3      | 6...1<br>28,27 | IN0 to IN7   | A                | sensor-Inputs, channels 0..7   |
| 18...11     | 14...7         | CPC0 to CPC7 | A                | reservoir capacitor, channels 0..7   |
| 20          | 16             | SCL          | I/O              | I <sup>2</sup> C clock signal  |
| 21          | 17             | SDA          | I/O              | I <sup>2</sup> C data signal   |
| 23          | 19             | A0           | I                | I <sup>2</sup> C address LSB, used to address two devices, low -> address 0x3A, high -> address 0x3B (examples only) |
| 25          | 21             | INTN         | O                | interrupt output, low level when interrupt is activated  |
| 27          | 23             | INTN_IN      | I                | interrupt input for device cascading, connect to VDD if not used   |
| 28          | 24             | CLK_IN       | I                | clock input for 'secondary' device, when a clock is provided by the 'primary' device                                 |
| 1           | 25             | CLK_OUT      | O                | clock output for device cascading/synchronization  |
| 22          | 18             | TEST         | A                | test pin, should be connected to VSS in application  |
| 24          | 20             | SLEEP        | I                | sleep mode, set to '1' to force the circuit into low-power sleep mode  |

## 9 Description

### 9.1 Basic functionality

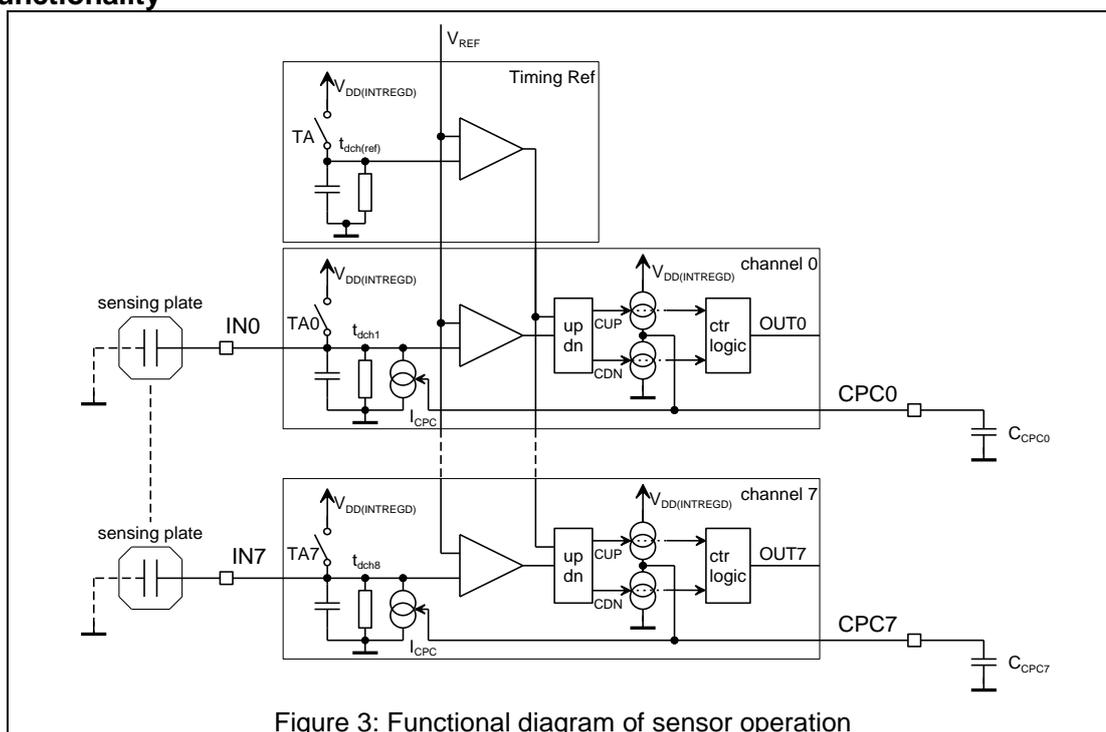


Figure 3 illustrates the functional principle of the MS8885B. The discharge times  $t_{dchx}$  on inputs  $INx$ , attached to the sensing plate capacitances, are compared to the discharge time  $t_{dch(ref)}$  of an internal RC timing element, for each sensor input sequentially. The RC timing circuits are periodically charged to  $V_{DD(INTREGD)}$  via MOS switches and then discharged via a resistor to  $V_{SS}$ . The charge-discharge cycle for each channel is governed by the sampling

<sup>1</sup> I: Input, O: Output, S: Supply, A: Analogue

# MS8885B

rate ( $f_s$ ). The channels are sampled sequentially, while the reference element is activated at the sampling point of each channel (see timing diagram in Figure 4). When the voltage of an RC combination falls below the  $V_{ref}$  level, the appropriate comparator output will change. The logic following the comparators determines which comparator switched first. If the reference comparator switches first, then a pulse is given on CUP. If the sensor comparator switches first then a pulse is given on CDN.

The pulses control the charge on the external capacitors CCPC on pins CPC0 to CPC7. Every time a pulse is given on CUP, capacitor CCPC is charged through a current source  $I_{src}$  from VDD(INTREGD) for a fixed time causing the voltage on CCPC to rise by a small increment. Likewise when a pulse occurs on CDN, capacitor CCPC is discharged through a current sink  $I_{sink}$  towards ground for a fixed time, causing the voltage on CCPC to fall by a small decrement. The voltage on CCPC controls an additional current sink  $I_{sink}$  that causes the capacitance attached to the input pin  $I_{Nx}$  to be discharged more quickly. This arrangement constitutes a closed loop control system, that constantly tries to equalise the discharge time  $t_{dch}$  with  $t_{dch(ref)}$ . In the equilibrium state, the discharge times are nearly equal and the pulses alternate between CUP and CDN.

The counter following this logic counts the pulses CUP or CDN respectively. The counter is reset every time the pulse sequence changes from CUP to CDN or vice versa. The output OUT0 to OUT7 will only be activated when a sufficient number of consecutive CUP or CDN pulses occur. Low level interference or slow changes in the input capacitance do not cause the output to switch.

Various measures, such as asymmetrical charge and discharge steps, are taken to ensure that the output switches off correctly. A special start-up circuit ensures that the device reaches equilibrium quickly when the supply is attached.

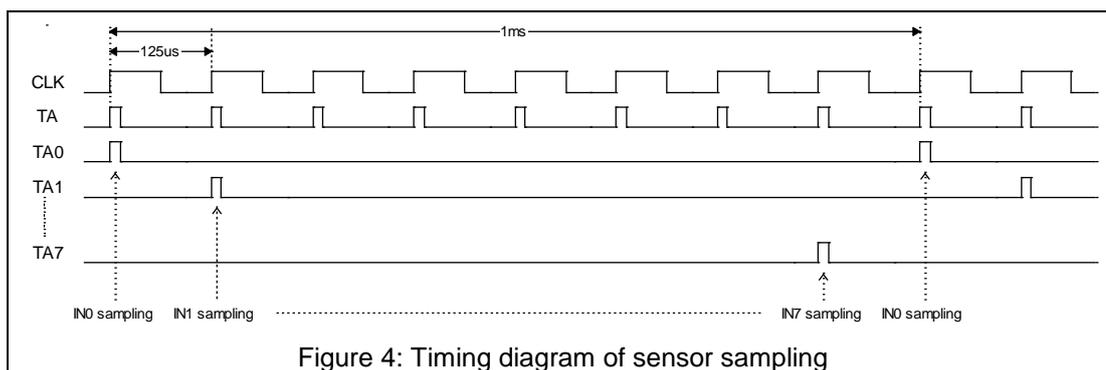


Figure 4: Timing diagram of sensor sampling

The sampling rate ( $f_s$ ) is derived from the internally generated oscillator frequency. The oscillator frequency can be adjusted within a specified range by programming the CLKREG register.

The status of the signals OUT0 to OUT7 is stored in the SENS register (see Table 7). An interrupt is generated on changes of the sensor states.

## 9.2 Operating modes

The operating characteristics of the MS8885B can be configured by programming the CONFIG register:

- Main operating mode: stand-alone, primary, or secondary
- Switching mode: direct or latching
- Key-press mode: N-key, 2-key or 1-key
- Sleep mode

### 9.2.1 Main operating modes

The MS8885B can operate in three operating modes: 'stand-alone', 'primary' and 'secondary'. The operating modes are implemented to support the application of two cascaded devices in the system, which is described in more detail in section 9.4 below. The modes are selected with the OPM bits in the configuration CONFIG register. The following table shows the main differences between the three modes.

# MS8885B

Table 3: Main operating modes

| Mode        | Clock source        | Oscillator | Clock output | Comment                               |
|-------------|---------------------|------------|--------------|---------------------------------------|
| stand-alone | internal oscillator | enabled    | disabled     | default operating mode after power-on |
| primary     | internal oscillator | enabled    | enabled      |                                       |
| secondary   | clock input         | disabled   | disabled     |                                       |

The default operating mode after power-up is 'stand-alone'.

## 9.2.2 Switching mode

Two switching modes are supported: direct and latching. The default switching mode after reset is direct mode. In **direct mode** the sensor state is directly reflected in the SENS register. When the sensor is activated, the corresponding bit in SENS is immediately set. When the sensor is released, the bit is cleared again. The bits are even cleared if the SENS register has not yet been read by the system controller. In **latching mode** every sensor-activation sets the corresponding bit in the SENS register. When the sensor is released, the SENS register is unaffected. Reading the SENS register resets those bits, whose sensor is not activated anymore.

## 9.2.3 Key press mode

There are three key-press modes implemented in the MS8885B.

In **N-key** mode each sensor activity is reflected in SENS, in accordance with the configured switching mode.

In **1-key** mode only the first sensor activation results in the corresponding bit being set in SENS. All further activations of the other sensors are suppressed at the SENS register boundary. In this way sensors in a keypad, which are activated accidentally because they are arranged next to the intended sensor, are masked out. The 1-key mode supports sensor matrix arrangements, where the columns and rows are attached to two separate (primary & secondary) MS8885B ICs. Only one row and one column sensor bit will be set in the SENS registers of the two devices. Each sensor-activation will raise an interrupt. The controller IC must handle the situation where the INTN is activated before the second sensor in the matrix has been activated.

In **2-key** mode only the two first sensor activations result in the corresponding bits being set in SENS. All further activations of the other sensors are suppressed at the SENS register boundary. This mode supports in particular the matrix arrangement of sensors, as illustrated in the application drawing in Figure 14 on page 13. In this way sensors in a matrix, which are activated accidentally because they are arranged next to the intended sensors, are masked out. This mode properly handles a delay in sensor activation due to unequal sensor capacitance/area, non-centric sensor touching, etc., as long as the intended sensors react before sensors which are accidentally activated.

The default key press mode after reset is N-key mode.

## 9.2.4 Channel masking

The channel masking register MASK allows individual sensor channels to be enabled or disabled for particular applications or certain modes (for example only the on/off sensor should be active).

When bit MSKMODE in CONFIG is set to '0', the disabled channels will continue to be sampled, but switching events will not be reflected in SENS and will not cause an interrupt. When bit MSKMODE in CONFIG is set to '1', only channels which are enabled are actually sampled. Reducing the number of sampled channels also reduces the power consumption.

When a channel becomes newly enabled, the fast start-up method is used to quickly reach the functional state.

## 9.2.5 Sleep mode

Sleep mode is implemented to save power during periods, where no sensor activity is expected or supported.

# MS8885B

In sleep mode most of the circuit parts are put in power down mode, in particular all analog blocks consuming static and dynamic power. This includes the oscillator, thus no internal activity remains. Also the voltage regulator is powered down, to reduce its standalone power consumption.

The I<sup>2</sup>C interface is powered from V<sub>DD</sub>. Therefore the system still remains responsive to I<sup>2</sup>C activity.

During sleep mode the register configuration is maintained. The charges in the CPC capacitors however cannot be guaranteed, as there is no limitation on the duration of the sleep mode. Therefore the analog part has to perform a normal start-up phase, including the fast start procedure for the CPC capacitor charging.

Sleep mode is entered when the SLEEP command is received from the system controller or when the SLEEP pin is set to high.

Wake-up from sleep is through the WAKE command, or by setting the SLEEP pin to low.

## 9.3 Interrupt generation

The MS8885B provides two mechanisms to inform the system controller, that a sensor activity has been detected.

### 9.3.1 Interrupt output INTN

The MS8885B has an interrupt output INTN, to flag to the system controller that a capacitive event has been detected. The controller can then fetch the sensor state by reading the SENS register over the I<sup>2</sup>C bus. The interrupt generation is controlled by the INTM bit of the CONFIG register:

- If INTM is '0' (default) then each bit change in SENS (set or clear) activates the INTN output.
- If INTM is '1', then only sensor press events, resulting in bits being set in SENS, activate the INTN output. Sensor release events which cause the corresponding bit in SENS to be cleared don't activate the INTN output.

In 2-key mode the INTN output is only activated after two bits have been set in the SENS register. The interrupt is automatically cleared when the system controller reads the SENS register. Alternatively the interrupt can be cleared using the CLINT command, without reading the actual sensor state.

The INTN pin is low active. When no interrupt is active, the INTN pin is at VDD level. It is pulled to VSS level when an interrupt is signalled.

### 9.3.2 Interrupt over the I<sup>2</sup>C bus

In order to flag an interrupt over the I<sup>2</sup>C bus, the MS8885B behaves like an I<sup>2</sup>C master with restricted functionality. The interrupt is signalled by sending a START condition, immediately followed by a STOP condition. This is illustrated in Figure 5. No further I<sup>2</sup>C master capabilities are supported.

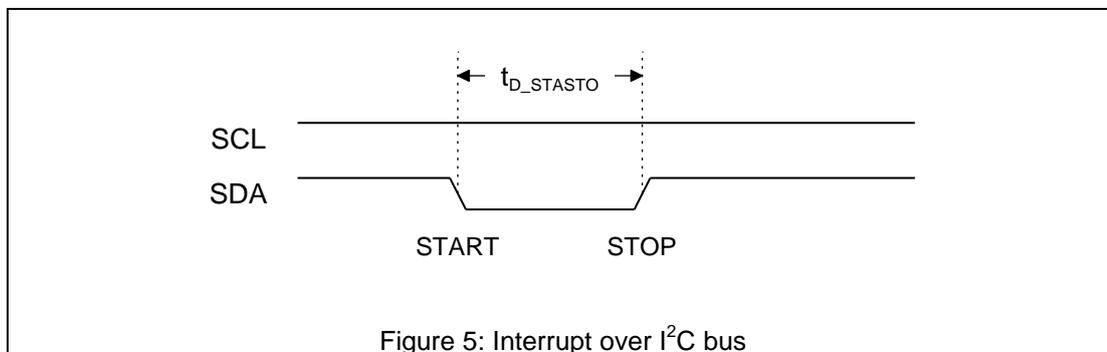


Figure 5: Interrupt over I<sup>2</sup>C bus

The system controller has to detect the START-STOP condition and react accordingly.

In order to enable this mode, the MS8885B has to be put in int-over-I<sup>2</sup>C mode. This is done with the INTI<sup>2</sup>C command. In reset state the int-over-I<sup>2</sup>C mode is disabled. In int-over-I<sup>2</sup>C mode the INTN functionality continues to work in the normal way.

# MS8885B

## 9.4 Device cascading

Two MS8885B devices can be connected to the same I<sup>2</sup>C bus, which facilitates up to 8x8 keypads.

The device provides the following features to guarantee robust operation and to simplify the system design using two devices:

- The 7-bit I<sup>2</sup>C address consists of 6 fixed bits and 1 selectable bit. The level externally applied to pin A0 ( $V_{DD}$  or  $V_{SS}$ ) defines the LSB of the I<sup>2</sup>C address. In this way two MS8885B can be addressed on the same bus without the need for different silicon versions with hard coded I<sup>2</sup>C addresses.
- The sensor activity can be synchronized, so that interference between the sensors of the different devices is avoided. One device is considered to be the 'primary' device. It provides the sample clock on pin CLK\_OUT. The other device is considered to be the 'secondary' device. It uses the clock provided by the 'primary' device instead of the internal clock. The 'primary' device samples the sensors on the rising edge of the internal sample clock. The CLK\_IN signal is inverted to derive the sample clock in the 'secondary' device. Therefore the 'secondary' device samples its sensors on the negative edge of the primary's sample clock. In this way no simultaneous sensor sampling occurs. 'Primary' or 'secondary' modes are enabled by programming the configuration register.
- The interrupt signal can be cascaded. The INTN output of the 'primary' device can be connected to the INTN\_IN input of the 'secondary' device. The INTN output of the 'secondary' device is then an OR'ed combination of the two interrupts.
- If two devices are cascaded and the int-over-I<sup>2</sup>C mode is desired, then it is sufficient to put the 'secondary' device in int-over-I<sup>2</sup>C mode. The 'primary' device still signals an interrupt over the INTN output to the INTN\_IN input of the 'secondary' device.

Figure 14 on page 13 illustrates a typical example of an application using two MS8885B circuits.

## 9.5 Clock generation

The MS8885B contains an integrated oscillator as main clock source. The oscillator runs nominally at  $f_{OSC}=128$  kHz. The internal clock frequency  $f_{clk}$  is derived from the oscillator clock by division by 1, 4, 16 or 64.

The eight sensors are sampled sequentially, which results in a default sensor sampling rate of  $f_s = 1$  kS/s.

In slave mode the internal clock generator is stopped, and the circuit is clocked from the CLK\_IN input pin.

### 9.5.1 Frequency adjustment

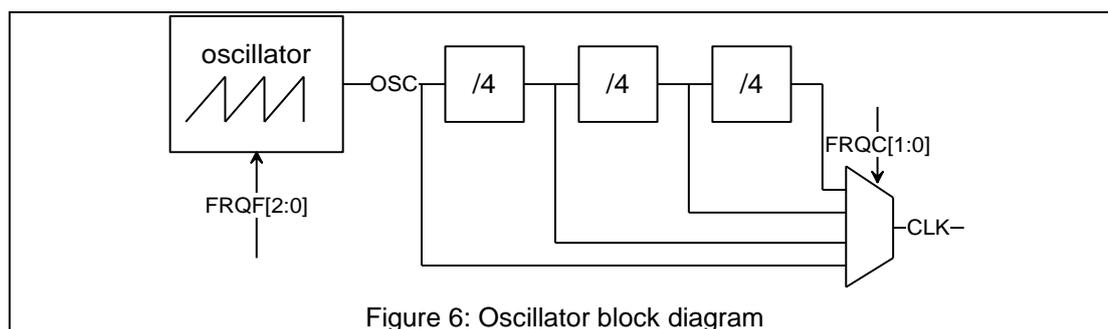


Figure 6: Oscillator block diagram

The frequency of the internal oscillator can be adjusted, and the programmable clock divider allows changing the sensor sampling rate further. This way the reaction time and power consumption of the circuit can be adjusted over a wide range.

The frequency settings are controlled by the CLKREG register with the bits FRQC[1:0] and FRQF[2:0] (details in section 10.3.4).

# MS8885B

## 9.6 Power architecture, reset concept, and start-up behaviour

### 9.6.1 Power Architecture

The circuit has an integrated voltage regulator, supplied from pin  $V_{DD}$ . The regulator provides an internal  $V_{DD(INTEGRD)}$  supply of nominally 2.8V.

If a stable and noise free external supply voltage with  $2.5V < V_{DD(ext)} < 3.0V$  is available in the system,  $V_{DD(INTEGRD)}$  can be provided from the external source. In this case  $V_{DD}$  and  $V_{DD(INTEGRD)}$  must both be connected to  $V_{DD(ext)}$ , and the internal regulator can be shut down in order to reduce the current consumption.

While the analog part of the circuit is powered from  $V_{DD(INTEGRD)}$ , the I<sup>2</sup>C interface and the registers are powered from  $V_{DD}$ . Therefore the I<sup>2</sup>C interface remains accessible in sleep mode, and the register values are maintained when  $V_{DD(INTEGRD)}$  is powered off.

### 9.6.2 Reset mechanism

Reset takes place during power-up of the circuit. There is no external hardware reset input.

During operation the device can be reset using the SRES command. The SRES resets all registers to their default values. It does not affect the state of the analog section except for those functions that are controlled by configuration bits.

### 9.6.3 Start-up procedure

After power-up of  $V_{DD}$  the registers in the  $V_{DD}$  domain are reset, which includes the VROF bit controlling the voltage regulator. The regulator is therefore enabled, and the  $V_{DD(INTEGRD)}$  domain is powered up. As soon as a sufficient  $V_{DD(INTEGRD)}$  level is reached, the POR is released.

After release of the POR in the  $V_{DD(INTEGRD)}$  domain, the circuit starts with the sensor sampling in the fast start mode (increased charge-pump currents quickly charge the CPC capacitors close to their target value). As soon as the capacitor voltages are close to the target value, the fast start phase is terminated, and the capacitors are charged in fine steps to the final value. When this state is reached, the logic enables the up/down counters, and the sensors are operational.

This start-up mechanism is executed independently in each channel.

## 10 I<sup>2</sup>C serial interface

The MS8885B has an I<sup>2</sup>C serial interface which operates as a slave receiver or transmitter. SDA and SCL are the data I/O and clock lines for the serial I<sup>2</sup>C Interface. SDA is used as an input or as an open-drain output. SDA is actively pulled low and is passively held high by the external pull-up resistor on the I<sup>2</sup>C bus.

In order to provide high link robustness, the I<sup>2</sup>C interface of the MS8885B is Fast-mode Plus (Fm+) compatible.

### 10.1 Supported I<sup>2</sup>C protocol

The following symbol set is used in the subsequent figures showing the I<sup>2</sup>C protocol:

- S = START symbol
- P = STOP symbol
- A = ACKNOWLEDGE bit
-  = sent from MS8885B
-  = sent from I<sup>2</sup>C Master

#### 10.1.1 Addressing

Figure 7 below shows the most basic transmission. It is useful to explain the addressing scheme.

# MS8885B

The 7-bit I<sup>2</sup>C address is composed of the 6 fixed base address bits 'aaaaaa' and the sub-address bit 'sa'. The I<sup>2</sup>C slave is addressed correctly, if the base address 'aaaaaa' matches the hard programmed address, and if the 'sa' bit matches the logic level on pin A0.

Therefore two identical MS8885B devices can be addressed, if one of them has A0 tied to logic '0', and the other one has A0 tied to logic '1'.

The base address reserved for the MS8885B is 'aaaaaa' = '010000'.

| I <sup>2</sup> C slave address |   |   |   |   |   |   |    |     |
|--------------------------------|---|---|---|---|---|---|----|-----|
| Bit                            | 7 | 6 | 5 | 4 | 3 | 2 | 1  | 0   |
|                                | 0 | 1 | 0 | 0 | 0 | 0 | A0 | R/W |

## 10.1.2 I<sup>2</sup>C Master writes command without data

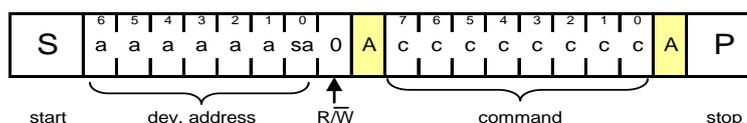


Figure 7: I<sup>2</sup>C command transmission

This protocol is used, if the I<sup>2</sup>C master only needs to send a single command to the MS8885B without additional data. The 8-bit command 'ccccccc' is transmitted in the 1st data byte.

## 10.1.3 I<sup>2</sup>C Master writes one data byte

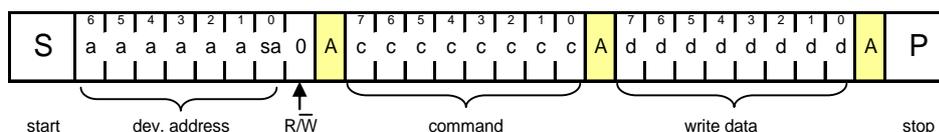


Figure 8: I<sup>2</sup>C write data transmission

This protocol is used, when the I<sup>2</sup>C master needs to program a register. The command part 'ccccccc' then specifies the write register command, including the selection of the register. The data byte contains the register content to be written.

## 10.1.4 I<sup>2</sup>C Master reads one data byte

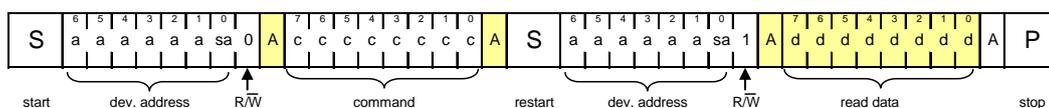


Figure 9: I<sup>2</sup>C read data transmission

In order to read a register, the I<sup>2</sup>C master first has to send the corresponding read command. Therefore the transmission starts with a command-write sequence. After this the transmission is not stopped, rather a restart (second START symbol) is sent, followed by a retransmission of the address. In this second start the R/W bit is set to '1', indicating to the slave that it must transmit the data byte.

## 10.1.5 I<sup>2</sup>C Master reads sensor data

The MS8885B supports direct reading of the sensor state from SENS register. If - after sending the address - the R/W bit is immediately set to '1' without sending a command, the circuit recognises that it must immediately return the content of the SENS register.

This transaction is illustrated in Figure 10.

# MS8885B

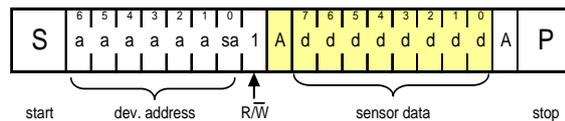


Figure 10: I<sup>2</sup>C read sensor data

When the transaction after reading the SENS register is not terminated with the STOP symbol, the MS8885B repeatedly sends the content of SENS again. This provides a means to continuously observe the sensor activity. This transaction is illustrated in Figure 11.

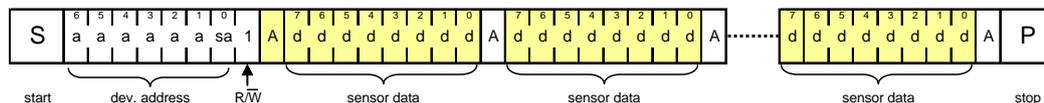


Figure 11: I<sup>2</sup>C read sensor data continuously

If two MS8885B are used in a cascaded configuration (Section 9.4) one is in the ‘primary’ and the other is in the ‘secondary’ role. When the direct read transaction is executed in a cascaded configuration, the ‘primary’ device transmits its SENS content register immediately after the address byte, followed by the ‘secondary’ device transmitting its SENS register content.

If the transaction after reading the two SENS registers is not terminated with the STOP symbol, the ‘primary’ and ‘secondary’ MS8885B continue sending the content of the SENS registers alternately. Such a transaction is illustrated in Figure 12.




Figure 12: I<sup>2</sup>C read sensor data, alternately from master & slave

It must be noted, that for this alternate data transfer only one MS8885B has to be addressed. By definition the ‘primary’ device must be addressed (sa bit set in the address set to ‘0’). In this particular case the ‘secondary’ device reacts on the address of the ‘primary’ device. For all other transactions targeting the ‘secondary’ device, it must be properly addressed with sa set to ‘1’.

## 10.2 I<sup>2</sup>C command descriptions

Table 4: Supported I<sup>2</sup>C bus commands

| OpCode      | Symbol | Command name              | Function   | Transfer type |
|-------------|--------|---------------------------|--|---------------|
| '0000 0000' | SRES   | soft-reset                | soft reset, brings device to reset state         | command       |
| '0000 0011' | CLINT  | clear-INTN                | clear INTN line                                  | command       |
| '0000 0101' | SLEEP  | sleep                     | enter sleep state                                | command       |
| '0000 0110' | WAKE   | wake                      | enter active state                               | command       |
| '0011 0000' | CFGWR  | write-config              | write configuration register                     | write 1 Byte  |
| '0011 0011' | CFGRD  | read-config               | read configuration register                      | read 1 Byte   |
| '0011 0101' | CLKWR  | write-clock               | write clock setting register                     | write 1 Byte  |
| '0011 0110' | CLKRD  | read-clock                | read clock setting register                      | read 1 Byte   |
| '0011 1001' | MSKWR  | write-mask                | write the mask register                          | write 1 Byte  |
| '0011 1010' | MSKRD  | read-mask                 | read the mask register                           | write 1 Byte  |
| '0011 1100' | INTI2C | int-over-I <sup>2</sup> C | put the device in int-over-I <sup>2</sup> C mode | command       |
| direct read | SENSRD | read-sensor               | read sensor state register (clears INTN)         | read N bytes  |

Several configuration settings can be programmed using single commands without associated data transfer. The configuration register can however also be written using the write data command (CFGWR). The clock and mask registers can only be programmed using the write data commands (CLKWR, MSKWR).

### 10.2.1 SRES command

Performs a soft reset of the circuit. Resets all registers to default values. Resets sensor channels. Exits int-over-I<sup>2</sup>C mode. See Section 9.6.2 on page 8.

# MS8885B

## 10.2.2 CLINT command

This command deactivates the interrupt line, without reading the sensor state register SRES.

## 10.2.3 CFGWR / CFGRD commands

These commands are used to write and read the complete configuration register.

## 10.2.4 CLKWR / CLKRD command

Used to write and read the complete clock setting register, mainly allowing the internal oscillator frequency to be tuned.

## 10.2.5 MSKWR / MASKRD commands

Used to write and read the MASK register.

## 10.2.6 INTI2C command

The MS8885B is put into int-over-I<sup>2</sup>C mode to enable an interrupt signalling over the I<sup>2</sup>C lines. This mode is described in more detail in Section 9.3.2 on page 6.

## 10.2.7 SENSRD command

This is the main transaction to read the actual sensor state information.

If the R/W bit is set to '1' immediately after the address bits, the MS8885B interprets the transaction as the SENSRD command.

The SENSRD transaction supports a repeated reading of the SENS register.

When two circuits are used in a cascaded configuration, the two circuits alternately return their SENS register content in a single transaction.

The protocols for the repeated read mode and alternating read mode are described in Section 10.1.5 in detail.

## 10.3 Register descriptions

### 10.3.1 Register overview

Table 5 Register overview

| Name   | Bit 7    | Bit 6 | Bit 5 | Bit 4     | Bit 3 | Bit 2     | Bit 1 | Bit 0   | Reset value |
|--------|----------|-------|-------|-----------|-------|-----------|-------|---------|-------------|
| CONFIG | OPM[1:0] |       | SWM   | KM[1:0]   |       | VROF      | INTM  | MSKMODE | '0000 0000' |
| SENS   | CH[7:0]  |       |       |           |       |           |       |         | '0000 0000' |
| CLKREG | CLO      | CLI   | n/a   | FRQC[1:0] |       | FRQF[2:0] |       |         | '00-0 1100' |
| MASK   | MSK[7:0] |       |       |           |       |           |       |         | '1111 1111' |

### 10.3.2 CONFIG: Configuration register

Table 6 CONFIG - configuration register, bit description

| Bit(s) | Symbol   | Function  | Reset value |
|--------|----------|---|-------------|
| 7:6    | OPM[1:0] | main operating mode<br>'00': stand-alone mode<br>'01': 'secondary' mode<br>'10': 'primary' mode<br>'11': n/a  | '00'        |
| 5      | SWM      | switching mode<br>'0': direct switching mode (sensor release clears bit in SENS)<br>'1': latching mode (reading SENS clears bit in SENS)  | '0'         |
| 4:3    | KM[1:0]  | key press mode<br>'00': N-key mode, each sensor activity is reflected in SENS<br>'01': 2-key mode, only first two keys are visible in SENS<br>'10': 1-key mode, only first key press is visible in SENS | '00'        |
| 2      | VROF     | voltage regulator off   | '0'         |
| 1      | INTM     | interrupt generation mode<br>'0': Interrupt is generated on each SENS bit change, press and release   | '0'         |

# MS8885B

|   |         |   |     |
|---|---------|---|-----|
|   |         | '1': Interrupt is generated on bits being set in SENS (press only)  |     |
| 0 | MSKMODE | channel masking mode<br>'0': normal power: masked out channels remain operational<br>'1': low power: masked out channels are powered down | '0' |

All bits in this register can be written and read.

## 10.3.3 SENS: Sensor state register

Table 7 SENS - sensor state register, bit description

| Bit(s) | Symbol  | Function                                       | Reset value |
|--------|---------|--|-------------|
| 7:0    | CH[7:0] | sensor state of respective channels IN7 to IN0 | '0000 0000' |

All bits in this register are read-only.

## 10.3.4 CLKREG: Clock setting register

Table 8 CLKREG - clock setting register, bit description

| Bit(s) | Symbol    | Function   | Reset value |
|--------|-----------|--|-------------|
| 7      | CLO       | CLK_OUT enable<br>'0': CLK_OUT is disabled (unless device is in 'primary' mode)<br>'1': CLK_OUT is enabled   | '0'         |
| 6      | CLI       | CLK_IN enable<br>'0': CLK_IN is disabled, (unless device is in 'secondary' mode)<br>'1': CLK_IN is enabled, and internal oscillator is powered down  | '0'         |
| 5      | n/a       | n/a  | n/a         |
| 4:3    | FRQC[1:0] | sampling clock frequency, coarse setting<br>'00', nominal sampling rate: $f_{clk} = f_{osc} / 64$<br>'01', nominal sampling rate: $f_{clk} = f_{osc} / 16$<br>'10', nominal sampling rate: $f_{clk} = f_{osc} / 4$<br>'11', nominal sampling rate: $f_{clk} = f_{osc}$ | '01'        |
| 2:0    | FRQF[2:0] | oscillator tuning<br>'000' min. frequency: $f_{osc} \approx 0.5 \cdot f_{osc,nom}$<br>...<br>'100' typical frequency: $f_{osc} \approx f_{osc,nom}$<br>...<br>'111' max. frequency: $f_{osc} \approx 2 \cdot f_{osc,nom}$  | '100'       |

All bits in this register can be written and read. Bit 5 should be written with logic 0 and if read, it can be either logic 0 or logic 1.

## 10.3.5 MASK: Channel enable mask register

Table 9 MASK - channel enable mask register, bit description

| Bit(s) | Symbol   | Function  | Reset value |
|--------|----------|---|-------------|
| 7:0    | MSK[7:0] | enable / disable individual sensor channels IN7 to IN0<br>'0': sensor channel is disabled<br>'1': sensor channel is enabled | '1111 1111' |

All bits in this register can be written and read.

# MS8885B

## 10.4 I<sup>2</sup>C interface timing

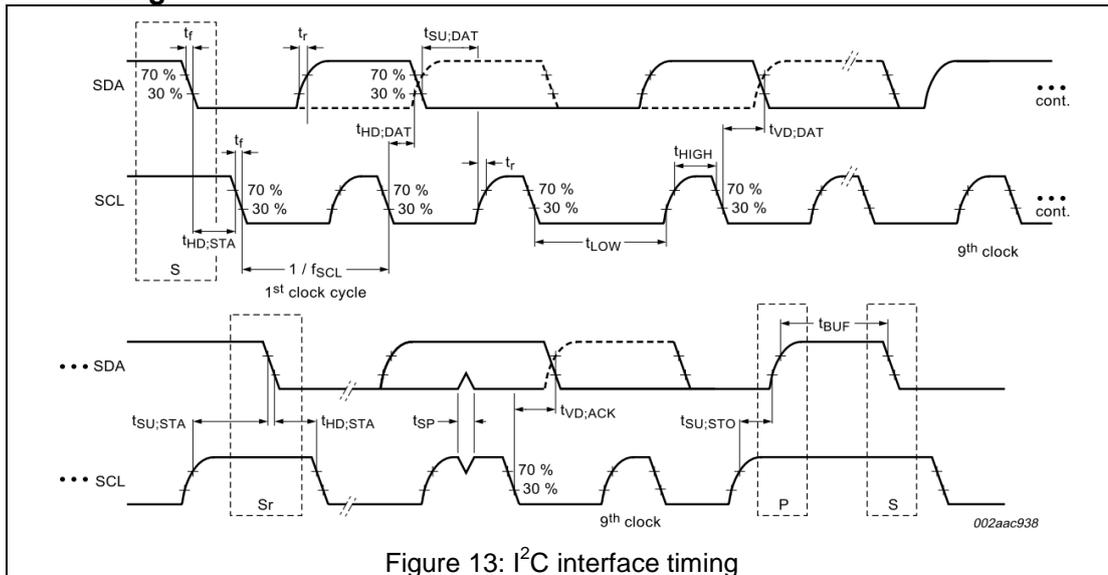


Figure 13: I<sup>2</sup>C interface timing

The timing figures are specified in Section 12.0.

## 11 Application design-in information

Figure 14 below shows the typical connections for a general application using two devices. For simplicity, the sensors attached to the 'secondary' device are not shown in this diagram. The sensors of the 'secondary' device can be arranged independently of the sensors of the 'primary' one or combined in a common larger matrix.

Both devices use different I<sup>2</sup>C addresses programmed by the voltage level applied to pin A0. The 'primary' circuit has A0 connected to ground; the 'secondary' one has A0 connected to V<sub>EXT</sub>. In this way each circuit is addressed individually.

The 'primary' device is configured to use the internal oscillator as clock reference. It is also programmed to enable the clock output. The 'secondary' device is programmed to use the clock output from the 'primary' device as input clock. The internal oscillator of the 'secondary' device is shut down to save power in this mode.

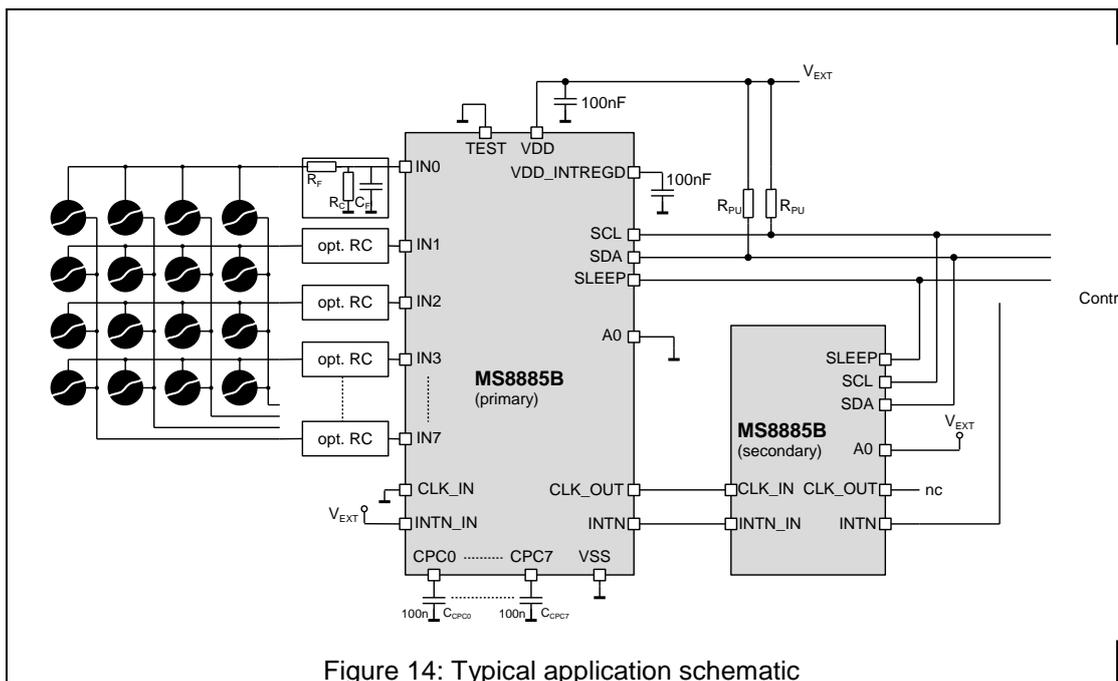


Figure 14: Typical application schematic

## MS8885B

The interrupt output INTN of the 'primary' is routed to the INTN\_IN input of the 'secondary' device, where it will be OR'ed with the interrupt state of the 'secondary'.

The sensing plate capacitances may consist of a small metal area, for example behind an isolating layer. Illustrated in Figure 14 is a 4x4 sensor arrangement. In this configuration, a sensor touch always excites two sensor plates at the same time.

The sensing plates are connected to a coaxial cable (for remote sensors) or a shielded connection, which in turn is connected to the input pin IN. The connection capacitance contributes to the input capacitance and must not be neglected. An internal low pass filter (not shown) is used to reduce RF interference. An additional low pass filter consisting of a resistor  $R_F$  and capacitor  $C_F$  can be added to the input to further improve RF immunity as required. For good performance, the total amount of capacitance on the input ( $C_S + C_{CABLE} + C_F$ ) should be in the proper range, the optimum point being around 30pF. Even if the external filtering is not required, placing  $C_F$  can help to bring the input capacitance to an optimal value. These conditions allow the control loop to adapt to the static capacitance on  $C_S$  of the sensor and to compensate for slow changes in the sensing plate capacitance. A higher capacitive input loading is possible provided that an additional discharge resistor  $R_C$  is used. Resistor  $R_C$  simply reduces the discharge time such that the internal timing requirements can be fulfilled.

The sensitivity of the sensors can be influenced by the sensing plate area and capacitors  $C_{CPC}$ . The sensitivity is significantly reduced when  $C_{CPC}$  is reduced. When maximum sensitivity is desired  $C_{CPC}$  can be increased, but this also increases sensitivity to interference. The CPC0 to CPC7 pins have high impedance and are sensitive to leakage currents. Therefore  $C_{CPC}$  should be a high quality foil or ceramic capacitor, for example an X7R type.

For the choice of proper component values for a given application, the component specifications in Section 12.2 must be followed.

# MS8885B

## 12 Electrical Characteristics

### 12.1 Limiting values

| Name                     | Parameter                           | Min  | Max             | Unit   |
|--------------------------|-------------------------------------|------|-----------------|--------|
| V <sub>DD</sub>          | positive supply                     | -0.5 | 8.0             | V      |
| V <sub>DD(INTREGD)</sub> | internal regulated supply           | -0.5 | 6.5             | V      |
| V <sub>I</sub>           | input voltage, on all input pins    | -0.5 | 6.5             | V      |
| I <sub>SS</sub>          | total current to V <sub>SS</sub>    | -50  | 50              | mA     |
| I <sub>n</sub>           | current through any pin, except SDA | -10  | 10              | mA     |
| I <sub>SDA</sub>         | current through SDA pin             | -30  | 30              | mA     |
| P <sub>tot</sub>         | power dissipation                   |      | 100             | mW     |
| V <sub>ESD</sub>         | electrostatic discharge voltage     |      | ± 2000<br>± 500 | V<br>V |
| I <sub>Iu</sub>          | latch-up current, at 85°C           |      | +/- 100         | mA     |
| T <sub>stg</sub>         | storage temperature                 | -60  | +125            | °C     |

Notes:

- Values exceeding the limiting values may cause permanent damage to the device.
- Inputs and outputs of the MS8885B are protected against electrostatic discharges (ESD) during normal handling. However to be totally safe, it is advisable to undertake handling precautions appropriate to handling MOS devices.

### 12.2 Static Characteristics

Conditions: V<sub>DD</sub> = 3.0V DC, V<sub>SS</sub>=0V, T<sub>amb</sub> = 25°C, if not stated otherwise

| Symbol   | Parameter   | Conditions / Comment  | Min                | Typ | Max                            | Unit |
|--|---|---|--------------------|-----|--------------------------------|------|
| V <sub>DD</sub>  | positive supply                                     |   | 2.5                |     | 5.5                            | V    |
| V <sub>DD(ext)</sub>   | external supply                                     | V <sub>DD</sub> connected to V <sub>DD(INTREGD)</sub> and internal regulator disabled | 2.5                |     | 3.3                            | V    |
| V <sub>DD(INTREGD)</sub>   | regulated internal supply                           | V <sub>DD</sub> > V <sub>lockin</sub>   | 2.5                | 2.9 | 3.3                            | V    |
| ΔV <sub>DD(INTREGD)</sub>  | regulator voltage drop                              | V <sub>DD</sub> < V <sub>lockin</sub> , no external load on V <sub>DD(INTREGD)</sub>  |                    | 10  |                                | mV   |
| I <sub>DD</sub>  | operating current                                   | idle state <sup>1</sup> , output inactive, f <sub>s</sub> = 1 kHz                     |                    | 10  | 20                             | μA   |
| I <sub>DD(sleep)</sub>   | sleep mode supply current                           | sleep mode  |                    | 100 | 500                            | nA   |
| Digital inputs (CLK_IN, A0, INTN_IN, SLEEP)  |   |   |                    |     |                                |      |
| V <sub>IL</sub>  | input LOW voltage                                   |   | V <sub>SS</sub>    |     | 0.3V <sub>DD</sub>             | V    |
| V <sub>IH</sub>  | input HIGH voltage                                  |   | 0.7V <sub>DD</sub> |     | V <sub>DD</sub>                | V    |
| Digital outputs (INTN, CLK_OUT)  |   |   |                    |     |                                |      |
| V <sub>OL</sub>  | output LOW voltage                                  | I <sub>OUT</sub> = 0.5mA  | V <sub>SS</sub>    |     | 0.2V <sub>DD</sub>             | V    |
| V <sub>OH</sub>  | output HIGH voltage                                 | I <sub>OUT</sub> = 0.5mA  | 0.8V <sub>DD</sub> |     | V <sub>DD</sub>                | V    |
| Analog pins (IN0 to IN7, CPC0 to CPC7)   |   |   |                    |     |                                |      |
| V <sub>CPC</sub>   | reservoir capacitor voltage on pins CPCx            | usable control range  | V <sub>SS</sub>    |     | V <sub>DD(INTREGD)</sub> - 0.3 | V    |
| C <sub>i</sub>   | input capacitance range (sensing plate & parasitic) |   | 10                 |     | 50                             | pF   |
| I <sup>2</sup> C interface pins (SDA, SCL, see I <sup>2</sup> C Fm+ specification [1]) |   |   |                    |     |                                |      |
| V <sub>IL</sub>  | input LOW voltage                                   |   | -0.5               |     | 0.3V <sub>DD</sub>             | V    |
| V <sub>IH</sub>  | input HIGH voltage                                  |   | 0.7V <sub>DD</sub> |     | 5.5                            | V    |
| I <sub>OL</sub>  | output LOW current                                  | V <sub>OL</sub> = 0.4V, SDA only  | 20                 |     |                                | mA   |
| I <sub>L</sub>   | leakage current                                     |   | -1                 |     | +1                             | μA   |
| C <sub>i</sub>   | pin capacitance                                     |   |                    |     | 10                             | pF   |
| External components  |   |   |                    |     |                                |      |
| C <sub>CPC</sub>   | reservoir capacitor                                 | low leakage X7R ceramic type recommended  | 22                 | 100 | 470                            | nF   |
| I <sub>L(CPC)</sub>  | reservoir capacitor                                 | low leakage X7R ceramic   | -1                 |     | 1                              | nA   |

<sup>1</sup> Idle state is the steady state after completed power-up, without any mode change and without any activity on the sensor plate and the voltages on the reservoir capacitors C<sub>CPC</sub> are settled.

# MS8885B

|                   |                             |  |     |     |    |    |
|-------------------|-----------------------------|--|-----|-----|----|----|
|                   | leakage current             | type recommended   |     |     |    |    |
| $C_{dec}$         | decoupling capacitance      | on pin $V_{DD}$ and $V_{DD(INTREGD)}$ , ceramic chip capacitor |     | 100 |    | nF |
| Temperature range |                             |  |     |     |    |    |
| $T_{amb}$         | operating temperature range |  | -40 | 25  | 85 | °C |

## 12.3 Dynamic Characteristics


Conditions:  $V_{DD} = 3.0V$  DC,  $V_{SS} = 0V$ ,  $T_{amb} = 25^{\circ}C$ , if not stated otherwise

| Symbol   | Parameter   | Conditions                                | Min  | Typ | Max  | Unit |
|--|---|---|------|-----|------|------|
| System timing  |   |   |      |     |      |      |
| $t_{startup}$  | power-on start-up time  | CCPC = 100nF, $f_s = 1$ kHz <sup>1)</sup> |      | 400 |      | ms   |
| $f_{osc}$  | internal RC oscillator frequency                                  | FRQF[2:0]='111'                           |      | 125 |      | kHz  |
|  |   | FRQF[2:0]='100' (default)                 |      | 80  |      | kHz  |
|  |   | FRQF[2:0]='000'                           |      | 40  |      | kHz  |
| $t_{SW}$   | reaction time on sensor capacitance change                        | $f_s = 1$ kHz                             |      | 64  |      | ms   |
| I <sup>2</sup> C interface characteristics (SDA, SCL, see [1]) |   |   |      |     |      |      |
| $t_{SP}$   | pulse width of spikes that must be suppressed by the input filter |   | 0    |     | 50   | ns   |
| $f_{SCL}$  | SCL clock frequency   |   | 0    |     | 1000 | kHz  |
| $t_{HD,STA}$   | hold time START cond.   |   | 0.26 |     |      | μs   |
| $t_{SU,STA}$   | setup time START cond.  |   | 0.26 |     |      | μs   |
| $t_{LOW}$  | LOW period of SCL   |   | 0.5  |     |      | μs   |
| $t_{HIGH}$   | HIGH period of SCL  |   | 0.26 |     |      | μs   |
| $t_{HD,DAT}$   | data hold time  |   | 0    |     |      | μs   |
| $t_{SU,DAT}$   | data setup time   |   | 50   |     |      | ns   |
| $t_r$  | rise time SDA, SCL  |   |      |     | 120  | ns   |
| $t_f$  | fall time SDA, SCL  |   |      |     | 120  | ns   |
| $t_{SU,STO}$   | setup time STOP cond.   |   | 0.26 |     |      | μs   |
| $t_{BUF}$  | bus free time between a START and STOP cond.                      |   | 0.5  |     |      | μs   |
| $C_b$  | capacitive load for each bus line                                 |   |      |     | 550  | pF   |
| $t_{VD,DAT}$   | data valid time   |   |      |     | 0.45 | μs   |
| $t_{VD,ACK}$   | acknowledge valid time  |   |      |     | 0.45 | μs   |
| $t_{D\_STASTO}$  | Duration of int-over-I <sup>2</sup> C pulse on SDA line           |   |      | 2   |      | μs   |

<sup>1)</sup> The sampling frequency  $f_s$  is described in section 9.5 on page 7.

# MS8885B

## 13 Package outline drawings

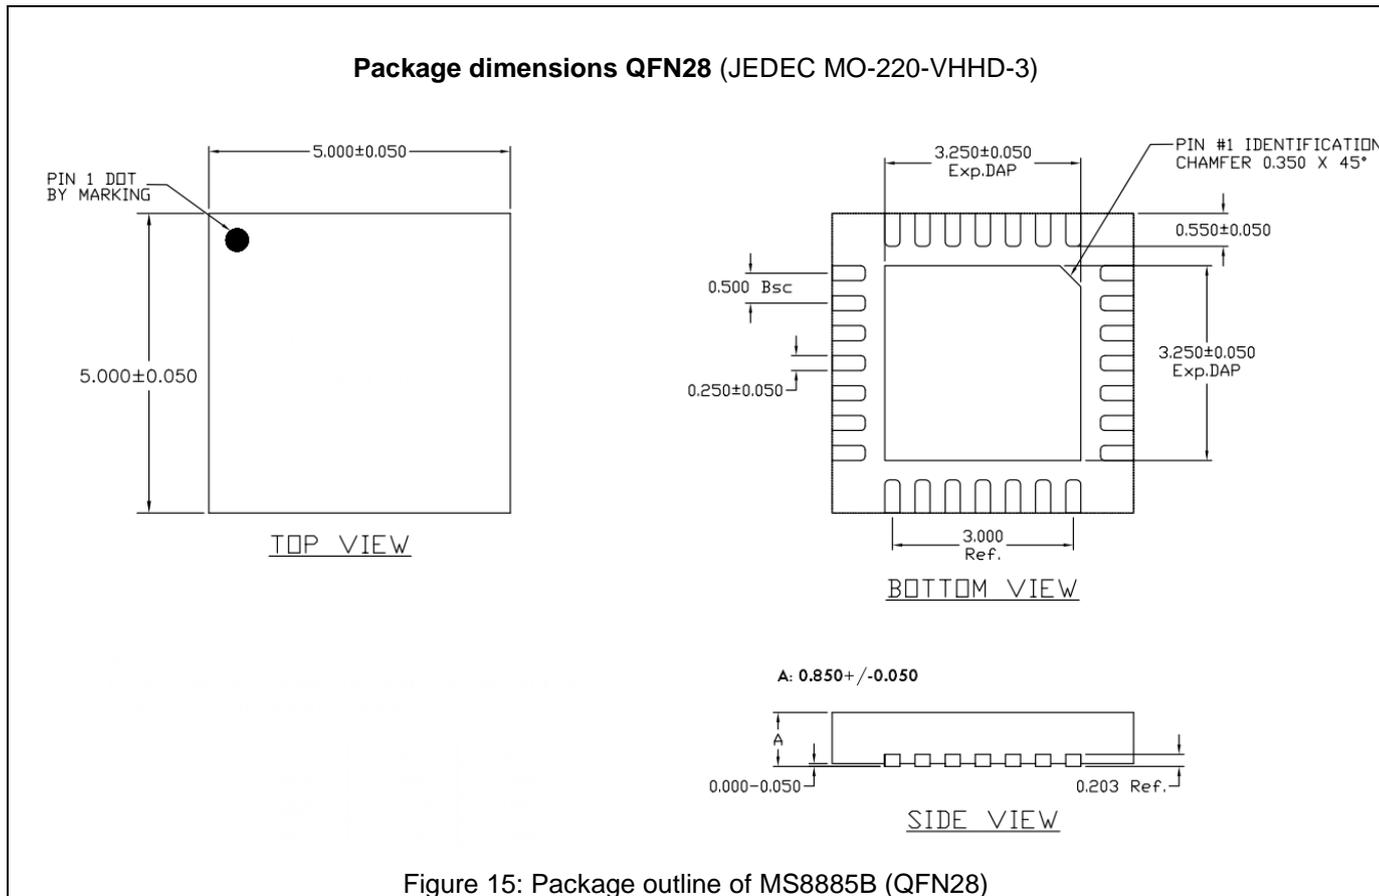

# MS8885B

## 14 Terms and abbreviations

| Name                               | Definition  |
|------------------------------------|---|
| Fast-start mode                    | After power-up or soft-reset the sensor channels are put in a fast starting mode, where the charge pump currents are strongly increased to reach the idle state quickly. During the fast-start mode the circuit is not ready for touch sensing. |
| Idle state                         | State where the circuit is settled, tracks adaptively slow environment changes, and is ready to detect touching events. Each channel has its own idle state.  |
| Fast-mode Plus (Fm+)               | The I <sup>2</sup> C specification distinguishes three modes with different electrical characteristics [1]. Fm+ is one of these modes.  |
| I <sup>2</sup> C master & slave    | The I <sup>2</sup> C master device controls the I <sup>2</sup> C bus and initiates transactions. The MS8885B is always an I <sup>2</sup> C slave device.  |
| MS8885B primary & secondary device | In a two-chip application the two circuits can be cascaded and synchronized. In this case one device is considered the primary device (providing clock), and the other device is considered the secondary one.                                  |

## 15 Legal disclaimer

This product is not designed for use in life support appliances or systems where malfunction of these parts can reasonably be expected to result in personal injury. Customers using or selling this product for use in such appliances do so at their own risk and agree to fully indemnify Microdul AG for any damages resulting from such applications.

## 16 Contents

|      |   |    |
|------|---|----|
| 1    | General Description .....                                       | 1  |
| 2    | Applications .....  | 1  |
| 3    | Typical application .....                                       | 1  |
| 4    | Features.....   | 1  |
| 5    | Ordering Information.....                                       | 1  |
| 6    | Pinout.....   | 2  |
| 7    | Block diagram .....   | 2  |
| 8    | Pin description .....   | 3  |
| 9    | Description .....   | 3  |
| 9.1  | Basic functionality.....  | 3  |
| 9.2  | Operating modes.....  | 4  |
| 9.3  | Interrupt generation .....                                      | 6  |
| 9.4  | Device cascading .....  | 7  |
| 9.5  | Clock generation.....   | 7  |
| 9.6  | Power architecture, reset concept, and start-up behaviour ..... | 8  |
| 10   | I <sup>2</sup> C serial interface .....                         | 8  |
| 10.1 | Supported I <sup>2</sup> C protocol .....                       | 8  |
| 10.2 | I <sup>2</sup> C command descriptions.....                      | 10 |
| 10.3 | Register descriptions .....                                     | 11 |
| 10.4 | I <sup>2</sup> C interface timing .....                         | 13 |
| 11   | Application design-in information .....                         | 13 |
| 12   | Electrical Characteristics .....                                | 15 |
| 12.1 | Limiting values.....  | 15 |
| 12.2 | Static Characteristics.....                                     | 15 |
| 12.3 | Dynamic Characteristics.....                                    | 16 |
| 13   | Package outline drawings .....                                  | 17 |
| 14   | Terms and abbreviations.....                                    | 18 |
| 15   | Legal disclaimer.....   | 18 |
| 16   | Contents .....  | 18 |