

Optical LLIS

Liquid Level Switches

Intrinsically safe for hazardous areas

Hazardous area approved, SST Sensing's range of intrinsically safe optical liquid level switches are designed and certified for use in demanding applications where direct contact with hydrocarbons, fuels, and flammable or explosive liquids is likely.

Using infrared technology and the principle of total internal reflection, our liquid level switches detect the presence or absence of most liquids. An almost instantaneous response time is standard, and switch point repeatability is +/- 1 mm.

SST liquid level switches have an operating temperature range between -30 °C and +80 °C (-22°F...+176°F). Stainless steel housing and a choice of sensing tip materials ensure they are extremely robust and resistant to chemical attack.




Highlights

- ATEX, UKCA and IECEx certified
- Ambient and liquid temperature – 30 °C...+80 °C (-22 °F...+176 °F)
- Metric and imperial process connection options
- NAMUR output
- Speed of response from the optical sensor is almost instantaneous
- No calibration required
- 316 stainless steel housing.

Applications

- Presence or absence of any liquid
- Petrochemicals / Oil and gas
- Heavy -duty automotive
- Leak detection
- Hydraulic reservoirs
- Tank / container level-control
- Downstream analyzer protection.

LLIS process connection dimensions

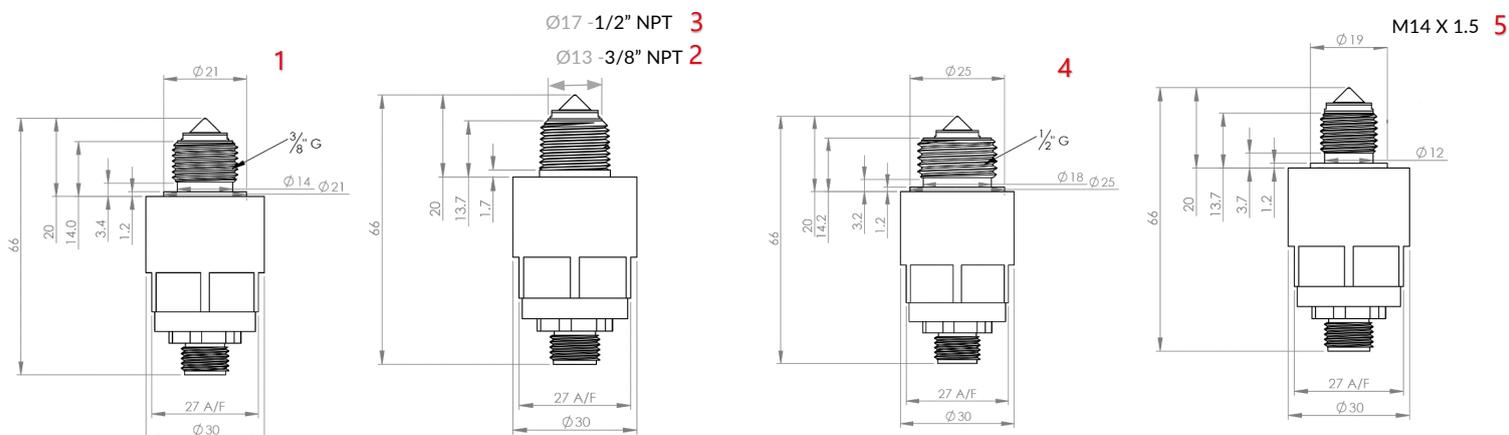

Note: The red numbers correspond to order information. See last page.

Accessories

Cable connector, NAMUR



- M12 angled female socket
- 4-pin A-coded
- Single-ended
- IP68 / IP69 protection
- Suitable for NAMUR technology
- Can be specified with Zinc diecast or SS 316L screw connection
- PUR cable - blue
- Various lengths available.

Single sensor barrier / controller



- 1-channel isolated barrier
- ATEX, IECEx, cULus hazardous area approved
- SIL2 capable
- Can be configured as:
 - Signal splitter
 - Line fault detection (LFD)
 - Reversed mode of operation
- 24 V DC supply.

Two sensor barrier / controller




- 2-channel isolated barrier
- ATEX, IECEx, cFMus, INMETRO, CCC, EAC-Ex hazardous area approved
- SIL2 certified
- DNV Marine approved
- Extended self-diagnostics and detection of cable fault
- Two relays - independent control
- 24 V DC supply
- Programmer required to configure barrier.

Technical specifications

Process connections		
Thread	3/8" G	3/8" NPT ½" NPT ½" G M14 x 1.5
Tightening torque	3 Nm / 26.5 in-lbs maximum	
Electrical input/output		
Power supply	+5 V DC...12 V DC (+8.2 V nominal)	
Supply current	Liquid detected: >3 mA; Air detected: <1 mA	
Output type	NAMUR	
Maximum input values	U _i = 12V, I _i = 130 mA, P _i = 85 mW, C _i = 1.08µF	
Interface	M12, 4-pin, A-coded connector (see accessories)	
Mechanical		
Sensor tip options	Polysulfone / Trogamid / Grilamid	
Seal O-Ring options	Viton / Nitrile	
Operating temperatures	-30 °C...+80 °C (-22 °F...+176 °F)	
Storage temperatures	-40 °C...+80 °C (-40°F...+176°F)	
Pressure	32 bar (464 psi) maximum	
Ingress protection	IP68	
Housing material	316 Stainless steel	
Weight	<100 g (<3.5 oz)	
Hazardous area certification		
ATEX / UKCA	IECEX	US/Canada/Japan
II 1 G Ex ia T4 Ga (-30 °C to +80 °C)	Ex ia IIC T4 Ga (-30 °C to +80 °C)	Certification in progress.

*Pin connection	
Pin	Designation
1	+ Vs
2	NC
3	0 V
4	NC

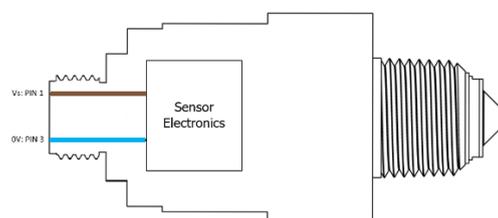

Order information

Generate your specific part number using the convention below. Fill the dotted boxes with the red letters and numbers that correspond with the switch output options you require.



Sensor tip material	
P:	Polysulfone
T:	Trogamid
G:	Grilamid

Seal O-ring	
V:	Viton
N:	Nitrile

Process connection	
1:	3/8" G
2:	3/8" NPT
3:	1/2" NPT
4:	1/2" G
5:	M14 x 1.5

Accessory	Part number		
Cable with connector REACH EC 1907/2006	CABSET02SS - Female cordset - M12 4-pin A-coded - Length 2m - SS 316L body	CABSET05 - Female cordset - M12 4-pin A-coded - Length 5m - Zinc diecast body	CABSET10 - Female cordset - M12 4-pin A-coded - Length 10m - Zinc diecast body
	(Other cable options available)		
1-channel isolated barrier	SSTC-KCD2-SOT-Ex1.LB		
2-channel isolated barrier	SSTC-9202B2B		